



Nissan Navara NP300 Series 5

2021 MY ONWARDS

REAR BAR

IMPORTANT! – READ BEFORE INSTALLATION

- When installed in accordance with these instructions, the rear protection tow bar maintains the factory tow rating of your vehicle.
- This product must be installed exactly as per these instructions using only hardware supplied.
- Take a few moments to read instructions thoroughly before beginning work.
- In the event of damage to any bar component please contact OFFROAD ANIMAL to arrange repair/replacement of components.
- Do not use this product for any vehicle make or model other than that specified on these instructions.
- Do not remove labels from this product.
- This product and its fixings must not be modified in any way unless stated in these fitting instructions.
- The installation of this product is recommended for trained personnel.
- These instructions are correct at time of publication. OFFROAD ANIMAL cannot be held responsible for the impact of any changes subsequently made by the vehicle manufacturer. If you find something has changed please contact us to let us know!
- During installation it is the duty of the installer to check correct operation/clearances of all components.
- If Instructions are to be printed for reference in the workshop, it is recommended that they are printed in colour, for best legibility.

PARTS LISTING

IMPORTANT: Check all parts are present before beginning work! Contact OFFROAD ANIMAL if something is missing.

Main Parts – In the Box

Qty	Part Number	Description	Image
1	RB-NNV-NP300-21-ASM1	NP300 21+ Navara Rear Bar Weldment	
1	B-0621R	NP300 21+ Navara Rear Bar - Wing Brace Br kt	
1	B-0621L	NP300 21+ Navara Rear Bar - Wing Brace Brkt	
1	N-0001R	Nissan NP300 Navara Rear Bar Plastic Radar Cover	
1	N-0001L	Nissan NP300 Navara Rear Bar Plastic Radar Cover	
1	B-0671R	NP300 21+ Navara Rear Bar Top Radar Support Bracket	
1	B-0671L	NP300 21+ Navara Rear Bar Top Radar Support Bracket	
1	B-0672R	NP300 21+ Navara Rear Bar Bottom Radar Support Bracket	
1	B-0672L	NP300 21+ Navara Rear Bar Bottom Radar Support Bracket	
2	BR25B	LED NUMBER PLATE LIGHT	
2	PW-P-14x9-870	Pinch Weld - Plain Non Seal 870mm	

Small Parts – Contained in Small Parts Kit Bag

Qty	Part Number	Description
12	M12X30X1.25	Bolt Hex, M12X30x1.25, GR8.8 ZP
12	M12 FW LHD	M12 FW Large Heavy Duty
4	M10 x 30	Bolt Hex, M10X30x[1.5], GR8.8 ZP
8	M10 FLANGE NUT	Flange Nut, M10x1.5 G8.8 ZP
4	M10X20 BHCS	SCREW, BUTTON HEAD CAP, M10X20X1.5 GR12.9 ZP
8	M10 Flat Washer	M10 FW
6	M8 FLANGE NUT	Flange Nut, M8x1.25 G8.8 ZP
18	M6x16 BHCS BLACK ZINC	SCREW, BUTTON HEAD CAP, M6X16X1 GR12.9 BLACK ZP
18	M6 FLAT WASHER BLACK ZINC	M6 FW BLACK ZP
18	M6 FLANGE NUT	Flange Nut, M6x1 G8.8 ZP
4	M5 Flat washer	M5 FW
4	M5X15 PAN	SCREW, PAN HEAD PHILLIPS, M5X15X0.8 GR4.6 ZP
4	M5 FLANGE NUT	Flange Nut, M5x0.8 G8.8 ZP
2	M5X30 PAN	SCREW, PAN HEAD PHILLIPS, M5X30X0.8 GR4.6 ZP
2	M5 NYLOC	NYLOC SELF LOCKING NUT, ST STL A2 ISO
1	M10 x 25	Bolt Hex, M10X25x[1.5], GR8.8 ZP
1	M10 NUT	Hex Nut, M10x1.5 G8.8 ZP

TOOLS REQUIRED

The following tools will be required to install the product.

Hand Tools	Power Tools	Workshop Equipment
Metric Socket Set 8-19mm Metric Spanner Set 8-19mm Hex (Allen) Key Set 4-8mm Trim Tool Utility Knife Side Cutters Wire Strippers	Soldering Iron Heat Gun Electric / Air Impact Driver (Optional but speeds up fitting process) Air Hacksaw or Reciprocating Saw	Lift Trolley Solder Heat Shrink Marker

WORKSHOP SAFETY

It is the responsibility of the installer to always complete works in a safe manner. Make sure the following safety equipment is available and precautions are observed whilst fitting this product.


<p>Hearing Protection</p> 	<p>Always wear ear protection when using power tools.</p>
<p>Eye Protection</p> 	<p>Ensure eye protection is always worn when cutting or drilling.</p>
<p>Manual Handling</p> 	<p>Do not attempt to lift bar assemblies or rock sliders on your own.</p> <p>Always use two people to lift or use mechanical Lifting aid such as hydraulic lifting trolley.</p>
<p>Vehicle Support</p> 	<p>Always ensure vehicle is properly supported when working on it. Do not attempt to fit products whilst suspension work is being carried out. Do not work under a vehicle supported only by a jack.</p>



1. Before beginning work on the bumper, remove factory towbar if fitted. The vehicle used for this example did not have towbar fitted.

TOOLS REQUIRED

FASTENERS

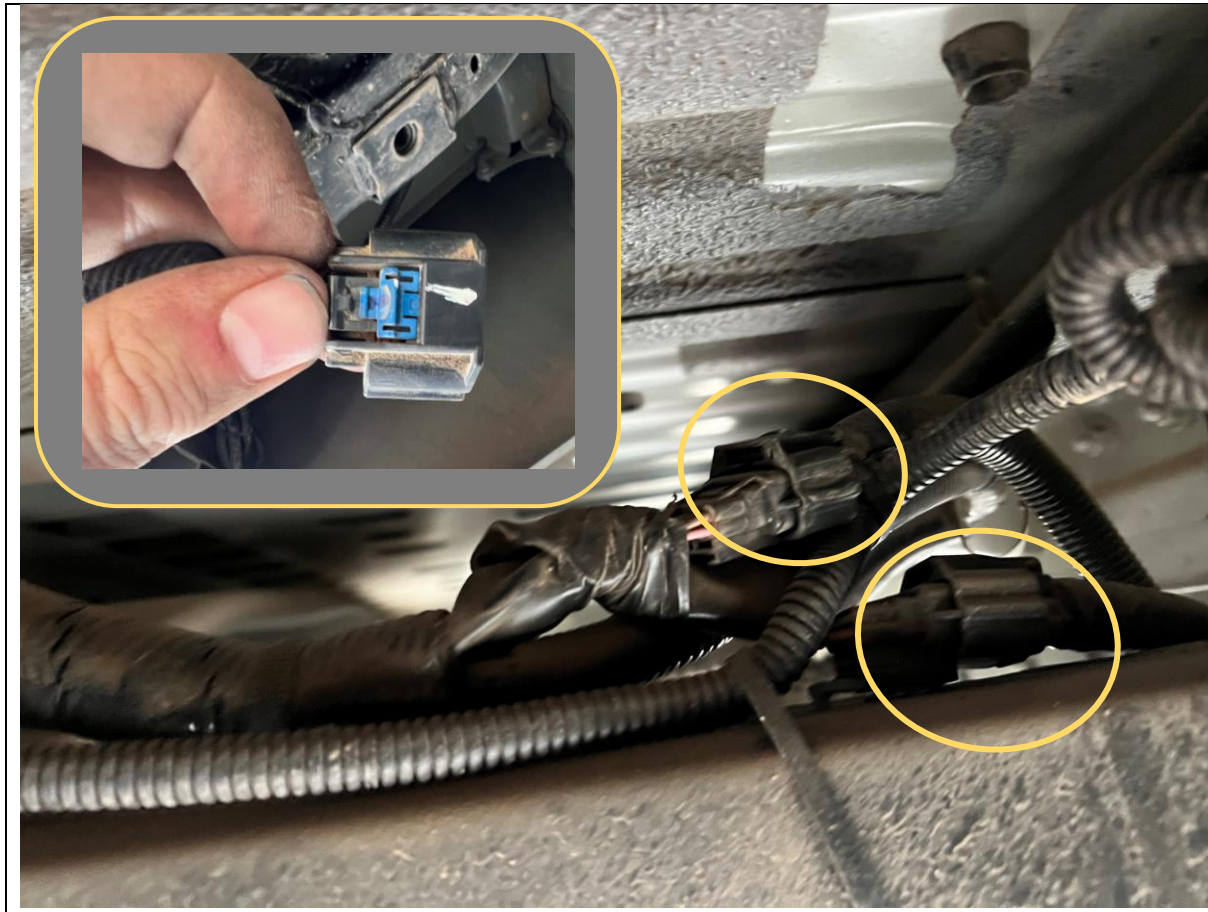

2. Disconnect the bumper electrical harness connectors, located on the top of the LH chassis rail.
3. The connectors have a locking tab that needs to be slid forward to allow the connector to unlock.

TOOLS REQUIRED

FASTENERS



4. Support bumper with lift trolley.
5. Remove 3x 17mm head factory bolts securing each side of the bumper to the chassis
6. Remove the factory tie down point on LH side by removing the 2x 17mm head bolts securing to chassis.
7. Carefully lower and remove factory bumper from car.

TOOLS REQUIRED

17mm Socket / Spanner

FASTENERS

Factory Flange Bolts




8. Disconnect the radar sensor wiring harness, this uses the same type of slide locking tab as the main connectors.
9. Remove the radar sensor bracket from bumper. Remove the 3x 12mm head factory flange bolts that secure to the rear bumper.
10. Complete on both sides of the bar.

TOOLS REQUIRED

12mm spanner

FASTENERS

Factory flange bolts – Retain for refitment

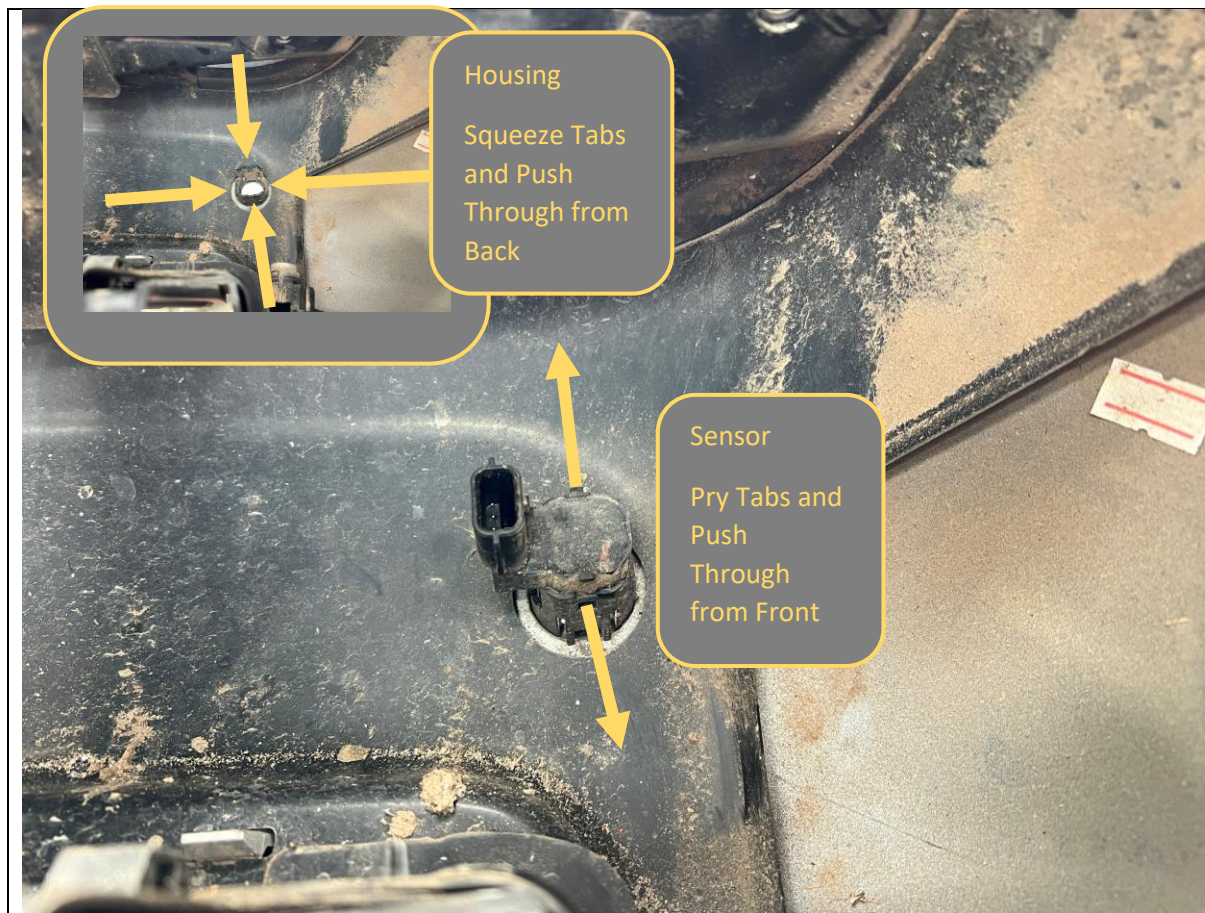

<p>11. Remove parking sensors from housings, by Prying the retaining tabs whilst pushing the sensor through from the front side of the bumper.</p> <p>12. Repeat for all sensors in the bumper.</p> <p>13. Remove sensor housing from the bumper, by squeezing the retaining tabs whilst pushing the housing through from the back side of the bumper.</p>	<p>TOOLS REQUIRED</p>
<p>14. Repeat for all housings in the bumper.</p> <p>15. Remove number plate from original rear bar.</p>	<p>FASTENERS</p>



16. Disconnect the number plate light wiring connectors from the lamp housings.

TOOLS REQUIRED


FASTENERS



17. Remove the main rear bar loom from the metal bumper beam, by unclipping harness connections with the trim tool.
18. Lay out removed harness in correct orientation to aid re-fitment to the new rear bar.

TOOLS REQUIRED
Trim Tool

FASTENERS

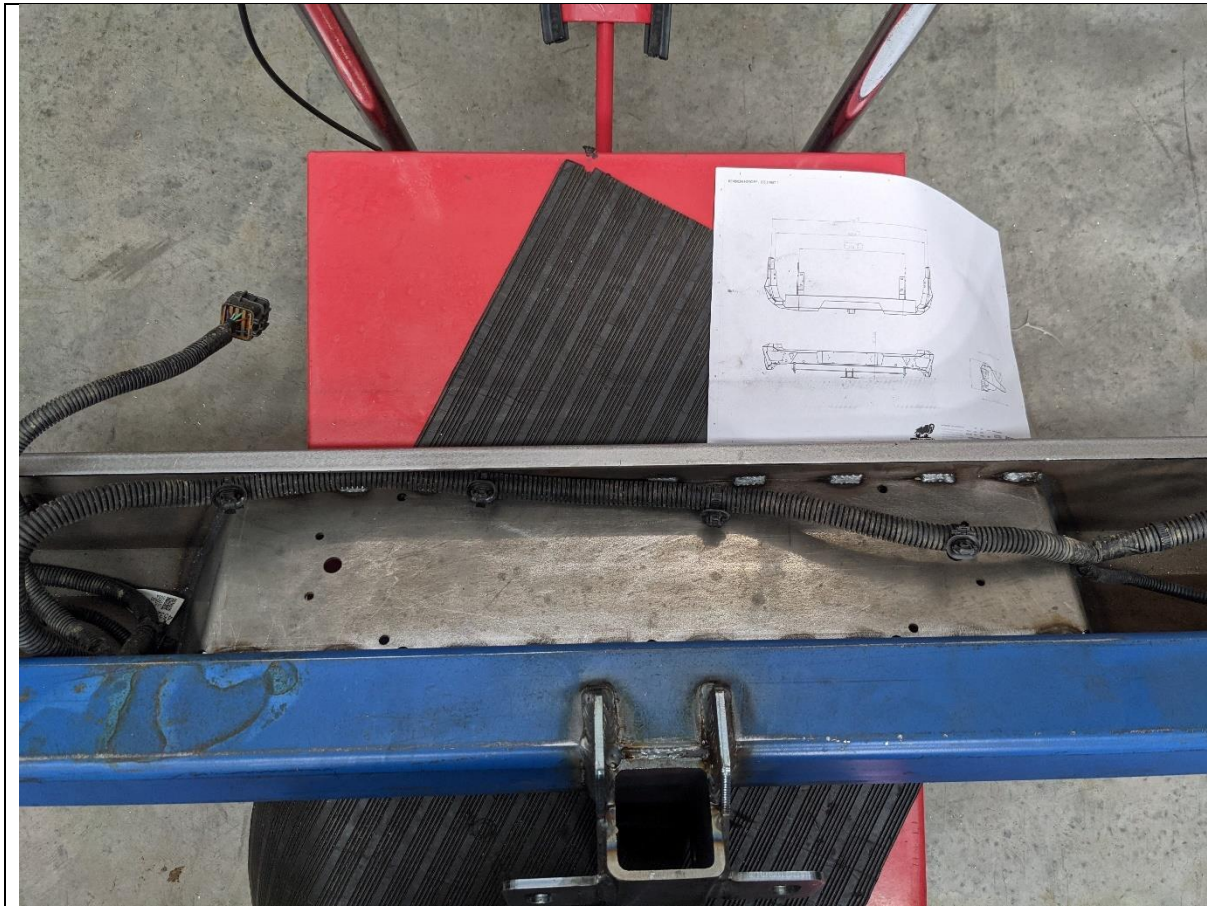

19. Fit the harness to the rear bar, routing the cables through the side arms so that the sensor wiring positions are in the correct locations. Ensure the correct orientation of the harness connectors is maintained.

TOOLS REQUIRED

FASTENERS



20. Fit plastic radar windows to the opening in the wing of the rear bar, using supplied M6x16 black bolts, Flat washers, and flange nuts.

TOOLS REQUIRED
4mm Hex Key

FASTENERS
6x M6x16 Black BHCS
6x M6 Black Washer
6x M6 Flange Nut

Per Side



21. Fit the mounting brackets to the radar sensor bracket that contains the rear radar module. Note the brackets are handed, match orientation to bar to determine correct brackets.

22. Re-use the factory 12mm head bolts, and supplied M8 Flange nuts

TOOLS REQUIRED
12/13mm socket / spanner

FASTENERS
3x M8 Factory bolts
3x M8 Flange Nut



23. Fit the number plate lamps to the rear bar, by first feeding the cable the bar, then securing with screws and nuts supplied in the lamp box.
24. Cut off lamp holder plugs from the factory wiring.
25. Solder to new LED number plate lamp cables. Use heat shrink or electrical tape to insulate solder connections. Crimp connectors can also be used if preferred.
26. Complete for both sides of vehicle.

TOOLS REQUIRED

- Soldering Iron
- Solder
- Heat Shrink / Gun
- Electrical Tape
- Side cutters
- Wire strippers

FASTENERS

- Screws supplied with Lights



27. Install sensors in housings by inserting the housing from outside of bar and pushing until sensors housings sit flush with the bar.

28. Complete for all sensor locations on rear bar.

TOOLS REQUIRED

FASTENERS



- 29. Install sensors in housings by inserting into housing from rear of bar and pushing until audible “Click” is heard.
- 30. Plug in loom to sensors once seated.
- 31. Complete for all sensors in bar.

TOOLS REQUIRED

FASTENERS



- 32. Mount the radar brackets to the bar, using supplied M6x16 Button head screws, Flat washers, and Flange Nuts.
- 33. Complete for both sides of bar.
- 34. Reconnect rear radar sensor loom to sensors.

TOOLS REQUIRED
4mm Hex Key

FASTENERS
4x M6x16 Button Head
4x M6 Flat Washer
4x M6 Flange Nut

Per side



- 35. Fit rubber pinch weld to edges of wing, in the location shown by pushing rubber over the edge.
- 36. Complete for both sides of vehicle.
- 37. Re fit Number Plate to rear bar, using original hardware.

TOOLS REQUIRED
Phillips Screwdriver

FASTENERS
Original Number Plate Bolts



<p>38. With assistance, from a lift trolley or another person, lift the rear bar onto the car.</p>	<p>TOOLS REQUIRED 18mm Socket / Spanner</p>
<p>39. Secure to side of chassis using 2xM12x30x1.25 Bolts, and M12 Large Flat Washers into captive chassis nuts</p> <p>40. Secure to Bottom of chassis nuts using 4xM12x30x1.25 Bolts into captive chassis nuts</p> <p>41. Fit bolts to both sides of chassis.</p> <p>42. Tighten all bolts.</p>	<p>FASTENERS 6xM12x30x1.25 Bolts 6x M12 Large Flat Washer</p> <p>per side</p>



- 43. Fit tub protection brace to the upright using 2x M10x30 Hex Bolts, flat washers, and M10 Flange nuts.
- 44. Secure to wing using 2x M10x20 Button head bolts, flat washers, and M10 Flange nuts.
- 45. Repeat for other side of vehicle.

TOOLS REQUIRED
16mm Socket / 15mm
Spanner
6mm Hex wrench

FASTENERS
2x M10x30 Hex Bolts
2x M10x20 Button Head
Bolts
4xM10 Flange Nut
4xM10 Flat Washer

per side



46. Secure the trailer plug to bracket on vehicle using M5 Screw and Flange Nut provided. If trailer wiring is not yet fitted now is the best time to complete. Follow instructions with trailer wiring harness.
47. Secure the loom using cable ties as required.
48. Re connect the sensor and number plate lamp harness connectors

TOOLS REQUIRED
8mm socket / spanner
Phillips head screwdriver
Cable Ties

FASTENERS
2x M5 Phillips head screw
2x M5 Flange nut.



- 49. Fit M10x25 Hex bolt and M10 Nut to anti rattle location on bottom of Hitch Box
- 50. Replace Trailer Ball Mount and secure with Pull Pin and R Clip.
- 51. Attach Offroad Animal Logo plate to chamfered face, using attached adhesive backing.
- 52. Fit towbar Compliance plate to underside of crossbar, using attached adhesive backing.
- 53. With that you are done!

TOOLS REQUIRED

- FASTENERS**
- Pull Pin
 - R-Clip
 - M10x25 Bolt
 - M10 Nut



Congratulations!
Head for the tracks and enjoy your newly protected NAVARA!