

ISUZU D-MAX
MY2021-2023
PREDATOR & TORO FRONT BAR






IMPORTANT! – READ BEFORE INSTALLATION

- When installed in accordance with these instructions, the front protection bar does not affect the operation of the vehicle's SRS airbags.
- This product must be installed exactly as per these instructions using only hardware supplied.
- Take a few moments to read instructions thoroughly before beginning work.
- In the event of damage to any bar component please contact OFFROAD ANIMAL to arrange repair/replacement of components.
- Do not use this product for any vehicle make or model other than that specified on these instructions.
- Do not remove labels from this product.
- This product and its fixings must not be modified in any way unless stated in these fitting instructions.
- The installation of this product is recommended for trained personnel.
- These instructions are correct at time of publication. OFFROAD ANIMAL cannot be held responsible for the impact of any changes subsequently made by the vehicle manufacturer. If you find something has changed please contact us to let us know!
- During installation it is the duty of the installer to check correct operation/clearances of all components.
- If Instructions are to be printed for reference in the workshop, it is recommended that they are printed in colour, for best legibility.








PARTS LISTING





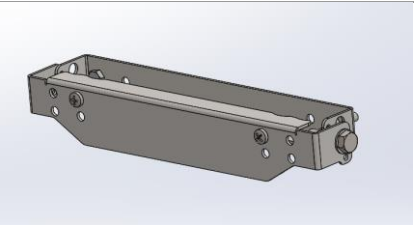
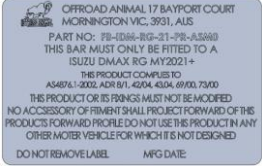


IMPORTANT: Check all parts are present before beginning work! Contact OFFROAD ANIMAL if something is missing.

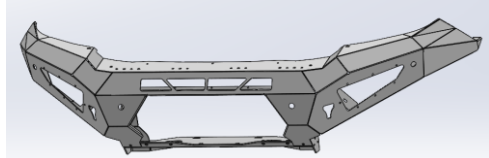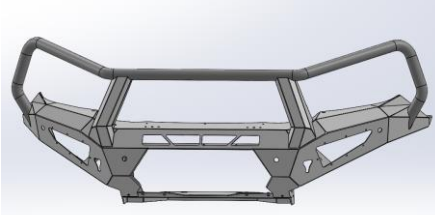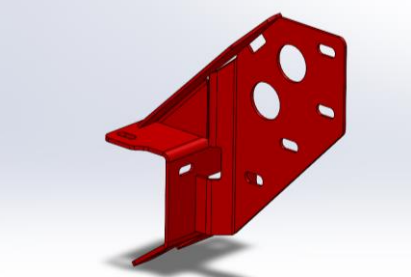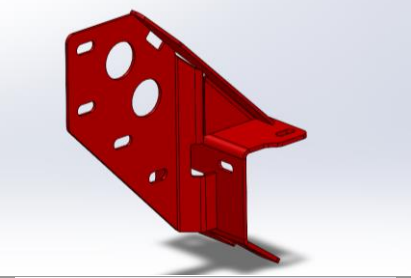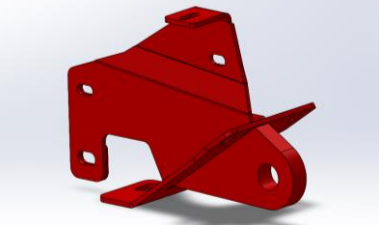Main Parts – In the Box

Qty	Part Number	Description	Image
1	FB-IDM-RG-21-PR-ASM1	ISUZU DMAX 21+ PREDATOR WELDMENT	
Or			
1	FB-IDM-RG-21-TOR-ASM1	ISUZU DMAX 21+ TORO WELDMENT	
1	FB-IDM-RG-21-PR-ASM2R	DMAX IMPACT ASSY	
1	FB-IDM-RG-21-PR-ASM2L	DMAX IMPACT ASSY	
1	FB-IDM-RG-21-PR-ASM3R	ISUZU DMAX 21+ TOW POINT ASSY	

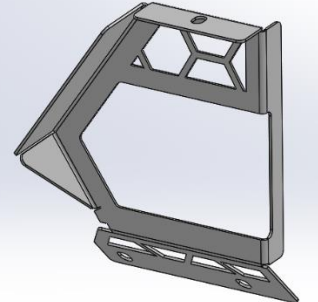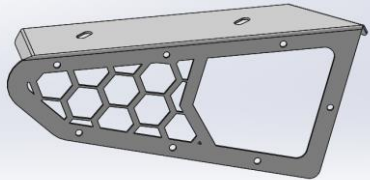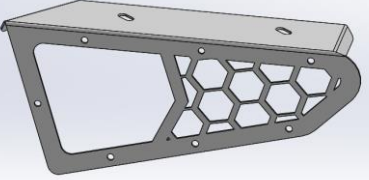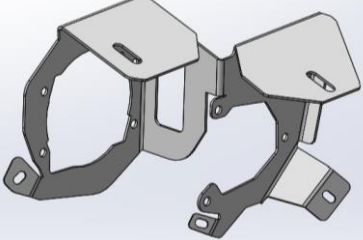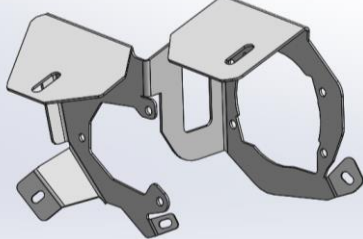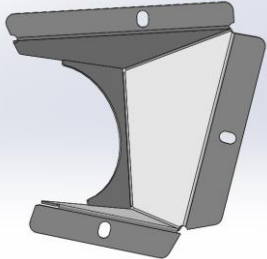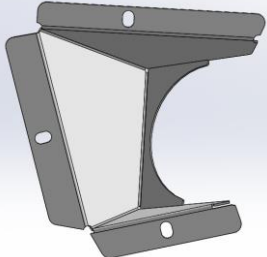1	FB-IDM-RG-21-PR-ASM3L	ISUZU DMAX 21+ TOW POINT ASSY	
1	U-0036	Isuzu DMAX 2021+ Predator Bash Plate	
1	U-0037L	Isuzu DMAX 2021+ Predator Side Underpanel	
1	U-0037R	Isuzu DMAX 2021+ Predator Side Underpanel	
1	U-0041	DMAX 21+ Supplementary Underpanel	
1	M-0014	DMax Predator Center Fairlead Mesh	
1	M-0015L	DMax Predator Side Mesh	
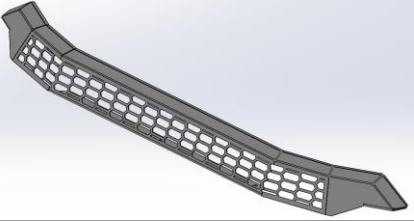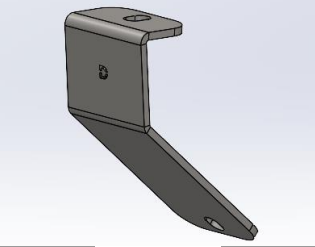
<p>1</p>	<p>M-0015R</p>	<p>DMax Predator Side Mesh</p>	
<p>1</p>	<p>M-0019R</p>	<p>Isuzu DMAX 2021+ Indicator/Fog Mesh Panel</p>	
<p>1</p>	<p>M-0019L</p>	<p>Isuzu DMAX 2021+ Indicator/Fog Mesh Panel</p>	
<p>1</p>	<p>B-0485R</p>	<p>Isuzu DMAX 2021+ Indicator/Fog Bracket</p>	
<p>1</p>	<p>B-0485L</p>	<p>Isuzu DMAX 2021+ Indicator/Fog Bracket</p>	
<p>1</p>	<p>B-0486R</p>	<p>Isuzu DMAX 2021+ Indicator/Fog infill</p>	
<p>1</p>	<p>B-0486L</p>	<p>Isuzu DMAX 2021+ Indicator/Fog infill</p>	

1	B-0487	Isuzu DMAX 2021+ Mesh Grille Fill Panel	
1	B-1055	Isuzu DMAX 21+ Pan brace	
1	B-1293R	D-MAX RG Headlight Corner Infill Bracket RH	
1	B-1293L	D-MAX RG Headlight Corner Infill Bracket LH	
1	NPF-COM-SM-ASM0	Number plate flip asm Small	
1	FB-IDM-RG-21-PR-ADRCP	ADR Compliance Plate DMAX 21+	
1	OFA-LOGO	Offroad Animal Metal Logo	
1	FI Note	Fitting Instruction Note	N/A
4	CPHP035	Plastic Hole Insert, 22MM, Black, Tigerlink Hardware CPHP035	
2	PWS-SIDE-275	Pinch Weld PWS53S - Side Bulb Seal 275mm	N/A

Small Parts – Contained in Small Parts Kit Bag

Qty	Part Number	Description
2	FB-IDM-RG-21-PR-ASM4	DMAX 21+ Tow Point Nut Plate
7	M10 FLANGE NUT	Flange Nut, M10x1.5 G8.8 ZP
11	M10 x 30	Bolt Hex, M10X30x[1.5], GR8.8 ZP
11	M10 Flat Washer	M10 FW
18	M12 FW LHD	M12 FW Large Heavy Duty
12	M12X30	Bolt Hex, M12X30x1.75, GR8.8 ZP
4	M12 FLANGE NUT	Flange Nut, M12x1.75 G8.8 ZP
6	M12 Nyloc nut	M12 NYLOC NUT
10	M8 FLAT WASHER- BLACK ZINC	M8 FW- BLACK ZINC
4	M8 X 16 BHCS BZP	SCREW, BUTTON HEAD CAP, M8X16X1.25 GR12.9 BLACK ZP
6	M8 X 20 BHCS BLACK ZINC	SCREW, BUTTON HEAD CAP, M8X20X1.25 BLACK ZP
4	M8 FLANGE NUT	Flange Nut, M8x1.25 G8.8 ZP
10	M6CN3MM	CAGE NUT M6x2.6-3.5
48	M6x16 BHCS BLACK ZINC	SCREW, BUTTON HEAD CAP, M6X16X1 GR12.9 BLACK ZP
48	M6 FLAT WASHER BLACK ZINC	M6 FW BLACK ZP
40	M6 FLANGE NUT	Flange Nut, M6x1 G8.8 ZP
2	M6 X 20 HEX	M6X20 HEX BOLT, ZP, 8.8
2	M6 FLAT WASHER	M6 FW
2	NP-COM-M10-190-ASM0	M10 LOLLYPOP NUT PLATE 190MM LONG
3	M5 FLANGE NUT	Flange Nut, M5x0.8 G8.8 ZP
3	M5 Flat washer	M5 FW
3	M5X15 BHCS	SCREW, BUTTON HEAD CAP, M5X15X0.8 GR12.9 ZP
4	M8 FLAT WASHER	M8 FW
4	M8 X 20 HEX	Bolt Hex, M8X20x1.25, GR8.8 ZP

TORO EXTRA Parts – IN ADDITION to PREDATOR Parts

Qty	Part Number	Description
2	B-0523	Toro Antenna Bracket - 90 Degree
4	M8 X 20 BHCS BLACK ZINC	SCREW, BUTTON HEAD CAP, M8X20X1.25, ISO4042 ZnNi BLACK PASSIVATED FINISH
4	M8 FLAT WASHER- BLACK ZINC	M8 FLAT WASHER, 16.5x8.4x1.2, ISO4042 ZnNi BLACK PASSIVATED FINISH

TOOLS REQUIRED


The following tools will be required to install the product.

Hand Tools	Power Tools	Workshop Equipment
Metric Socket Set 8-19mm Socket Extension Bar Metric Spanner Set 10-19mm Torx Drivers T25-T30 Hex (Allen) Key Set 4-6mm Trim Puller Tool Flat Blade Screwdriver set Phillips Head Screwdriver set Utility Knife Side Cutters Pliers	Electric Drill 6mm Drill Bit Air Hacksaw or Angle Grinder Electric/Air Impact Driver (Optional)	Panel Stand or Soft Blanket Cable Ties Masking Tape Black Automotive paint Scotch Brite or Fine Sandpaper Automotive Sealant/Adhesive Bucket Hose Clamp

WORKSHOP SAFETY

It is the responsibility of the installer to always complete works in a safe manner. Make sure the following safety equipment is available and precautions are observed whilst fitting this product.

<p>Hearing Protection</p> 	<p>Always wear ear protection when using power tools.</p>
<p>Eye Protection</p> 	<p>Ensure eye protection is always worn when cutting or drilling.</p>
<p>Manual Handling</p> 	<p>Do not attempt to lift bar assemblies or rock sliders on your own.</p> <p>Always use two people to lift or use mechanical lifting aid such as hydraulic lifting trolley.</p>
<p>Vehicle Support</p> 	<p>Always ensure vehicle is properly supported when working on it. Do not attempt to fit products whilst suspension work is being carried out. Do not work under a vehicle supported only by a jack.</p>

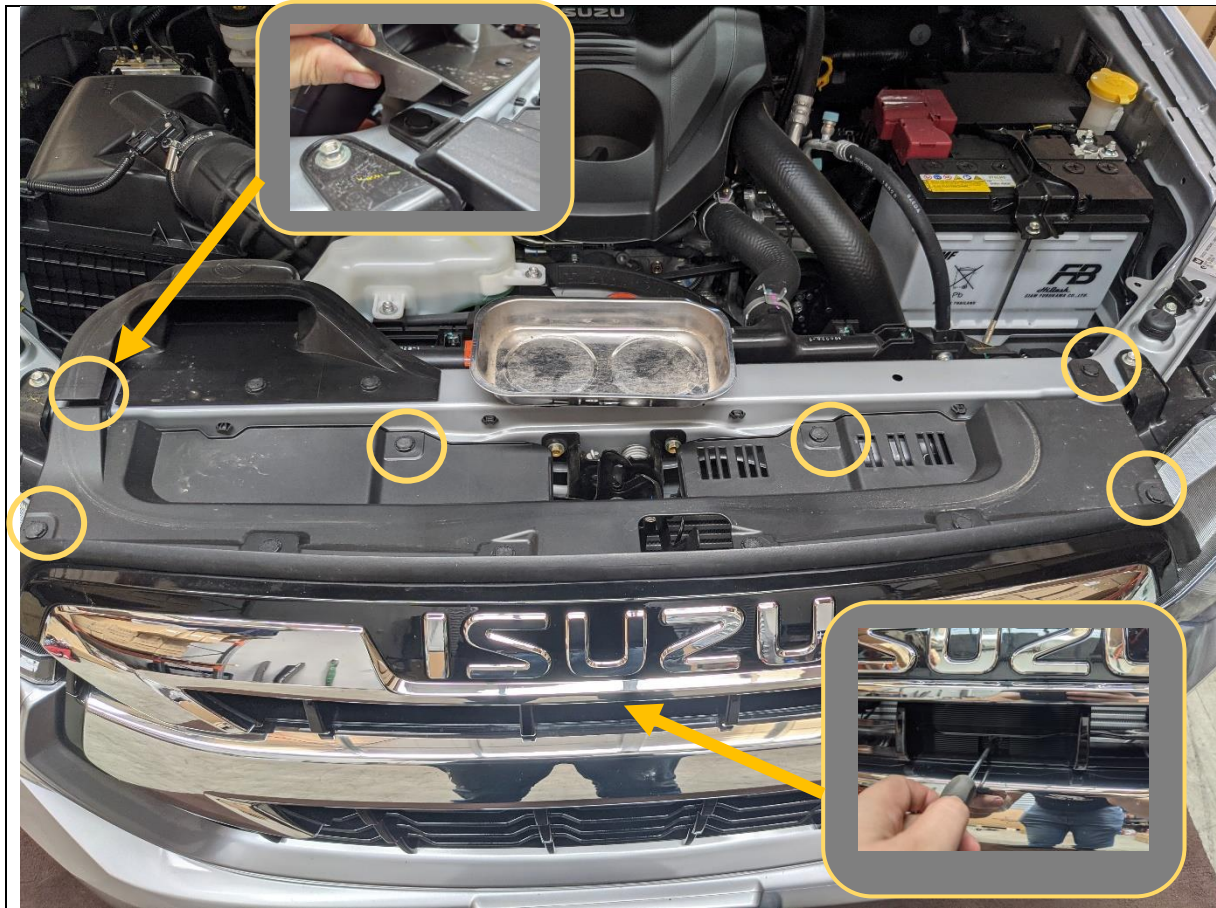

1. Open the Bonnet.
2. Remove the 4x Clips securing the top of the grille by levering up center part using small flat blade screwdriver
3. Remove phillips head screw securing bottom of grille underneath "ISUZU" badge.
4. Remove the top portion of the grille from the car

TOOLS REQUIRED
Small Flathead Screwdriver
Phillips Head screwdriver

FASTENERS
Retain Factory Clips and Screw



5. Remove the three screws securing the bottom edge of the bumper, using 10mm Socket / Spanner

TOOLS REQUIRED
10mm socket / spanner

FASTENERS




6. Remove the clips on the underside of the wheel arch by the bumper to quarter panel seam, and under the bottom of the bumper near wheel as shown.
7. Remove using same technique as other clips
8. Remove the 10mm nut securing bottom of bumper.
9. Repeat for other side of vehicle

TOOLS REQUIRED

10mm socket
Trim Tool

FASTENERS

Factory Clip and Nut

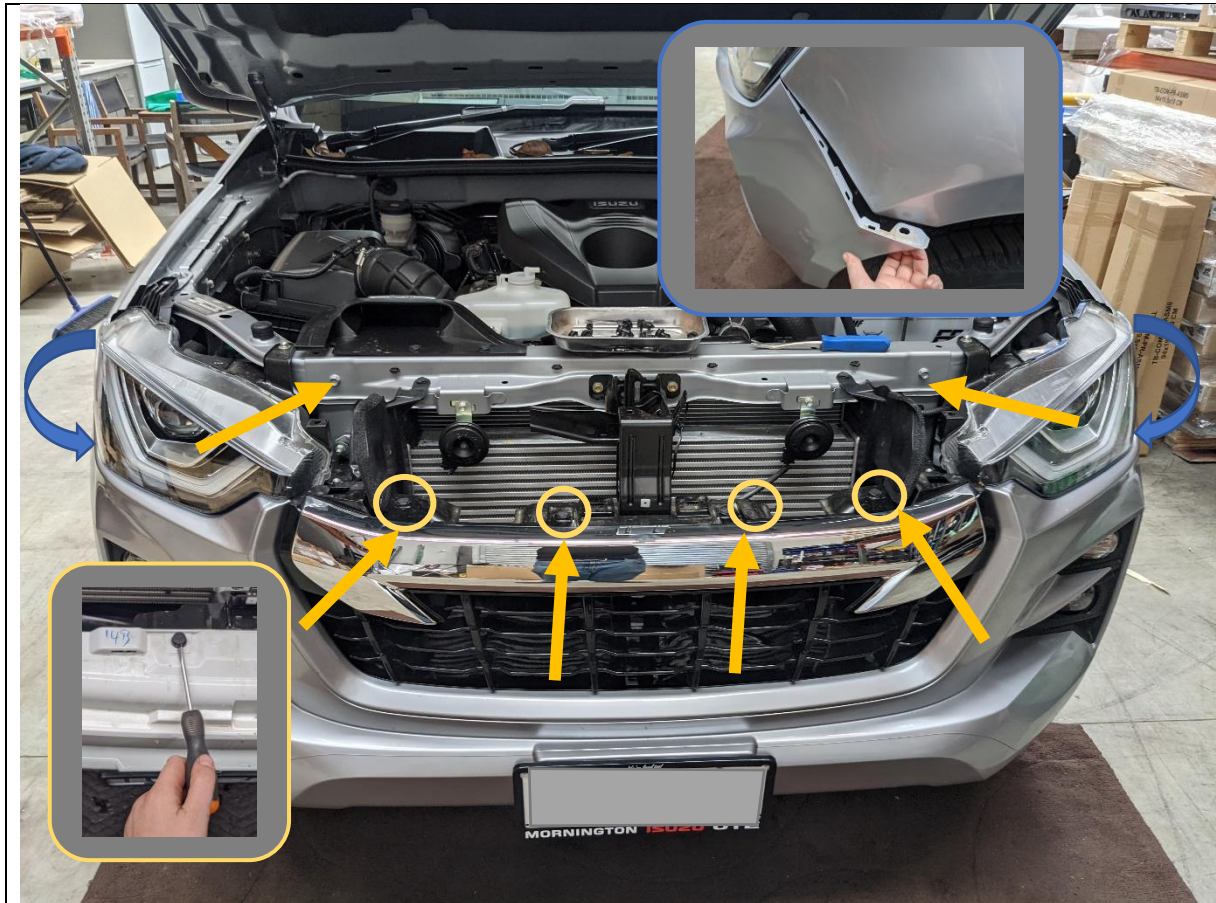


10. Remove the 4x clips securing the center of the bumper using small flat blade screwdriver to pry up the center section
11. Release the bumper clips by pulling bumper away from bottom of headlights, starting from the outside and working in.
12. When bumper is loose, reach in and disconnect the fog light wiring harness located under the left hand headlight.
13. Remove bumper from car and set aside on soft blanket or panel stand.

TOOLS REQUIRED

Small flat blade screwdriver

FASTENERS

Factory Clips

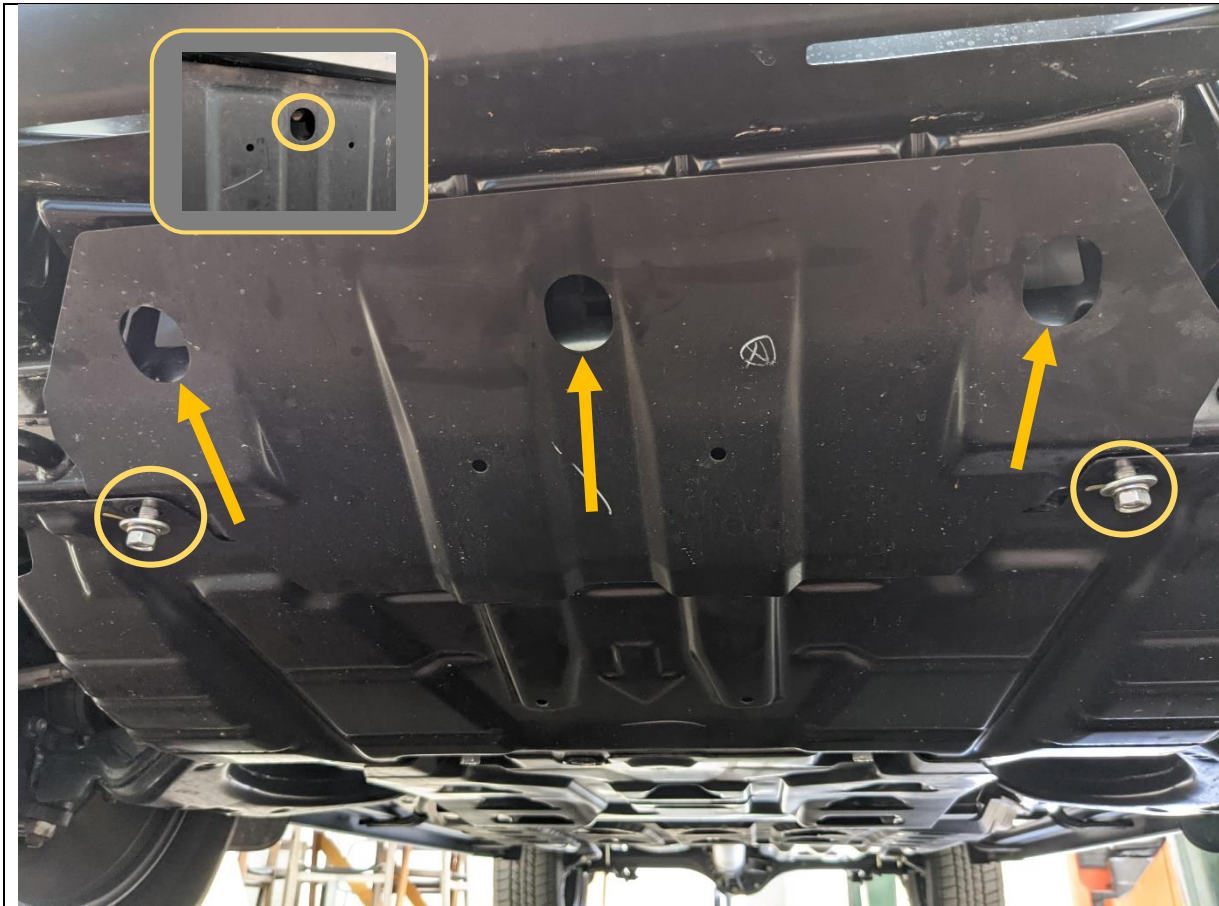


14. Remove the front skid plate by removing the 5x 14mm head bolts securing it to the chassis. Note 3x of the bolts are recessed into the skid plate, shown with arrows.

TOOLS REQUIRED

14mm socket
Short extension bar

FASTENERS

Factory 14mm head bolts.
Retain for refitment.

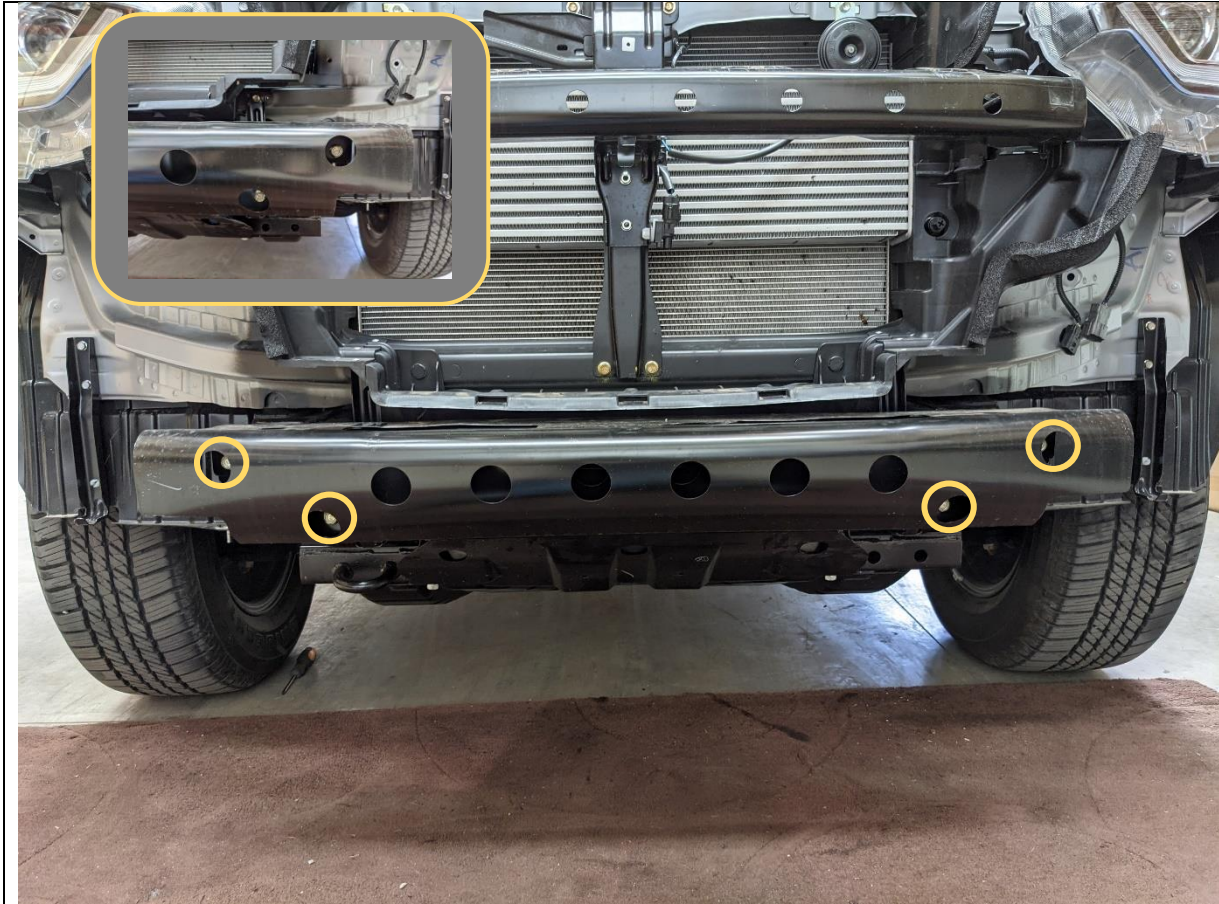


15. Remove the 4x 14mm head bolts that secure the impact beam to the chassis
16. Remove and discard the impact beam. Retain bolts for fitting of mount.

TOOLS REQUIRED
14mm socket

FASTENERS

Retain for re-fitment of mounts

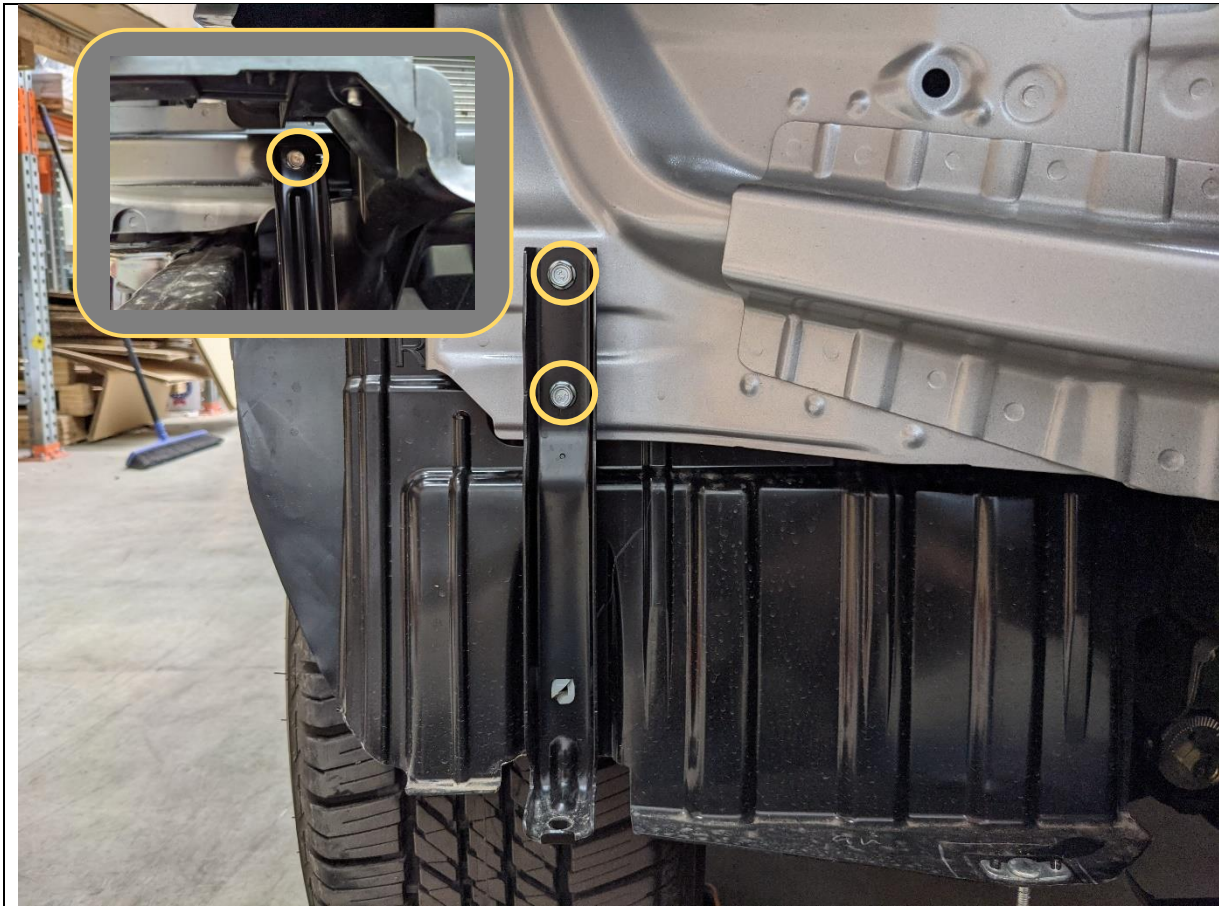

17. Remove the 10mm bolts securing the bottom bumper supports.

18. Remove and discard the bumper supports

TOOLS REQUIRED

10mm socket

FASTENERS

Factory 10mm head bolts
Discard



19. Clean the corner of the quarter panel with isopropyl alcohol and a rag, as indicated by the arrow.
20. Also clean the top flange surfaces of the supplied headlight corner infills, as indicated by the arrows in the above inset image.

TOOLS REQUIRED

Isopropyl alcohol
Workshop rag

FASTENERS



21. Apply 1x 30x6mm VHB tape strip to each headlight corner infill, as shown.

22. Peel off the red backing film for the tape strip, then adhere the headlight corner infill to the quarter panel.

Note the top bolt hole of the infill is fitted behind the quarter panel sheet metal, and the lower bolt hole on the outside of the headlight.

23. Hold the infill in place and press firmly up against the quarter panel for at least 20 seconds for the tape to properly adhere.

24. Secure the top of the headlight corner infill with 1x M6x16 button head bolt, black flat washer and flange nut. Secure the bottom by re-using the factory 10mm hex bolt into the headlight.

25. Repeat for other side.


TOOLS REQUIRED

4mm hex/Allen key
10mm socket/spanner

FASTENERS

2x M6x16 black button head bolt
2x M6 black flat washer
2x M6 flange nut

2x factory 10mm hex bolts

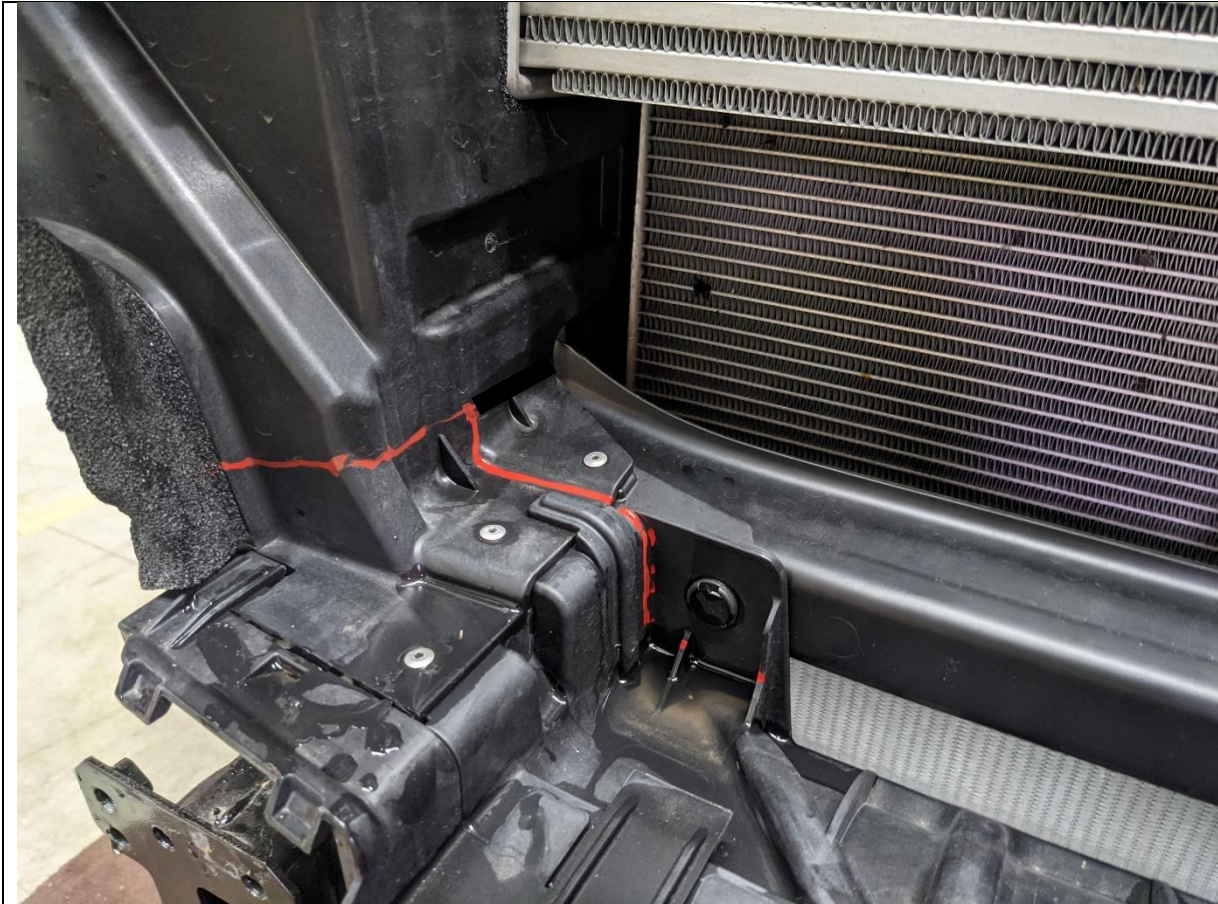

26. Trim the plastic air guide along the marking as shown.
27. It is easiest to remove the guide from the vehicle before trimming. Guide is secured with clips
28. Replace the top section of trimmed guide once cuts are completed.

TOOLS REQUIRED
Utility knife or
air hacksaw


FASTENERS



- 29. Unplug the electrical connectors from the fog light and indicators.
- 30. Remove the harness clips from the bumper using a trim tool.
- 31. Set aside harness for re-fitment to Offroad Animal Bar.
- 32. If equipped, remove the parking sensors and parking sensor harness from the bumper.

TOOLS REQUIRED
Trim Tools

FASTENERS

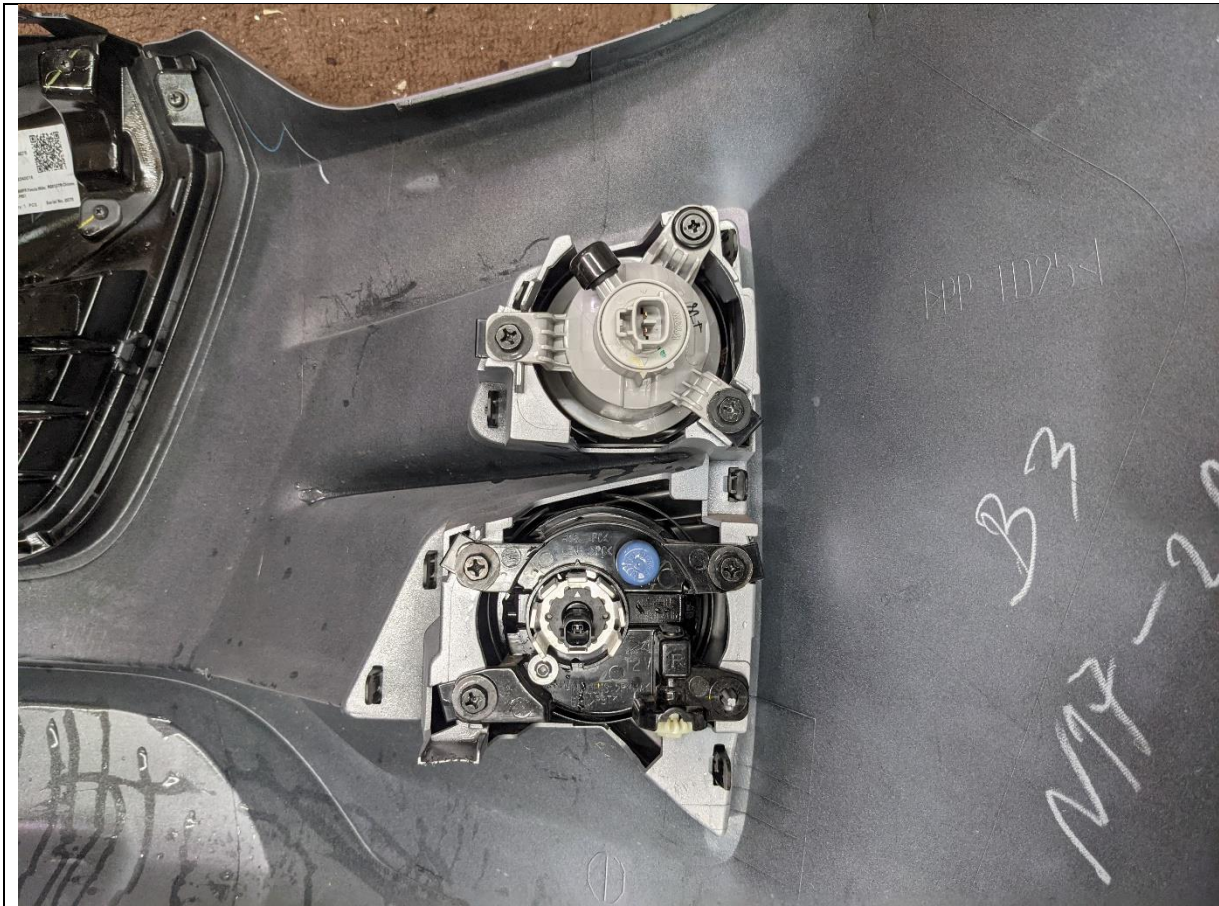


33. Remove the indicator and fog lights from the bumper using Phillips head screwdriver.

34. Discard the factory Philips head screws.

TOOLS REQUIRED
Phillips head screwdriver

FASTENERS
OE Philips head screws

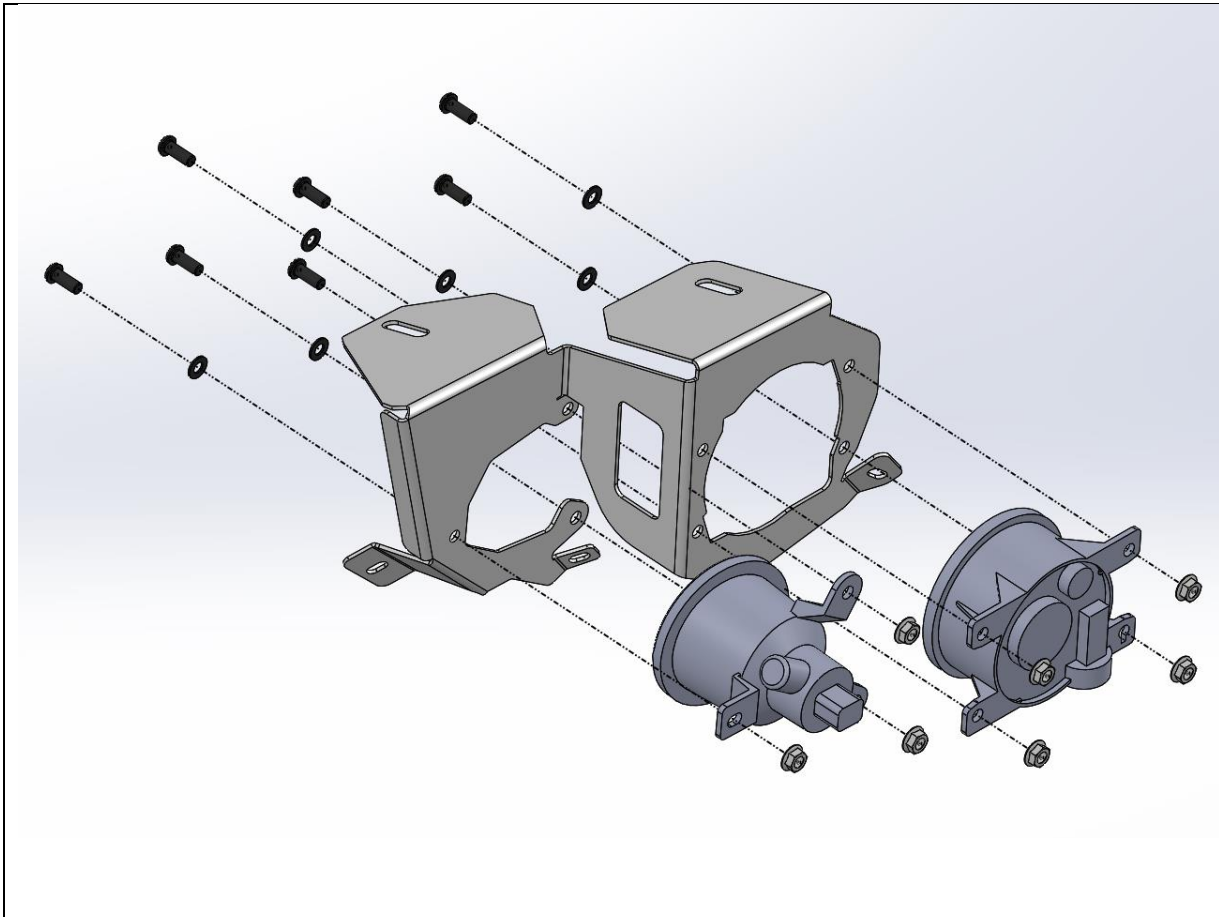


- 35. Fit the fog light and indicator to the light mounting bracket supplied in the kit using supplied M6x16 button head screws, flat washers, and flange nuts.
- 36. Lights sit on the back side of the bracket. Take care to ensure the correct handed lights are re-fitted.

TOOLS REQUIRED
4mm Allen Key

FASTENERS
7x M6x16 Button Head Screw
7x M6Flat Washer
7x M6 Flange Nut


Per side

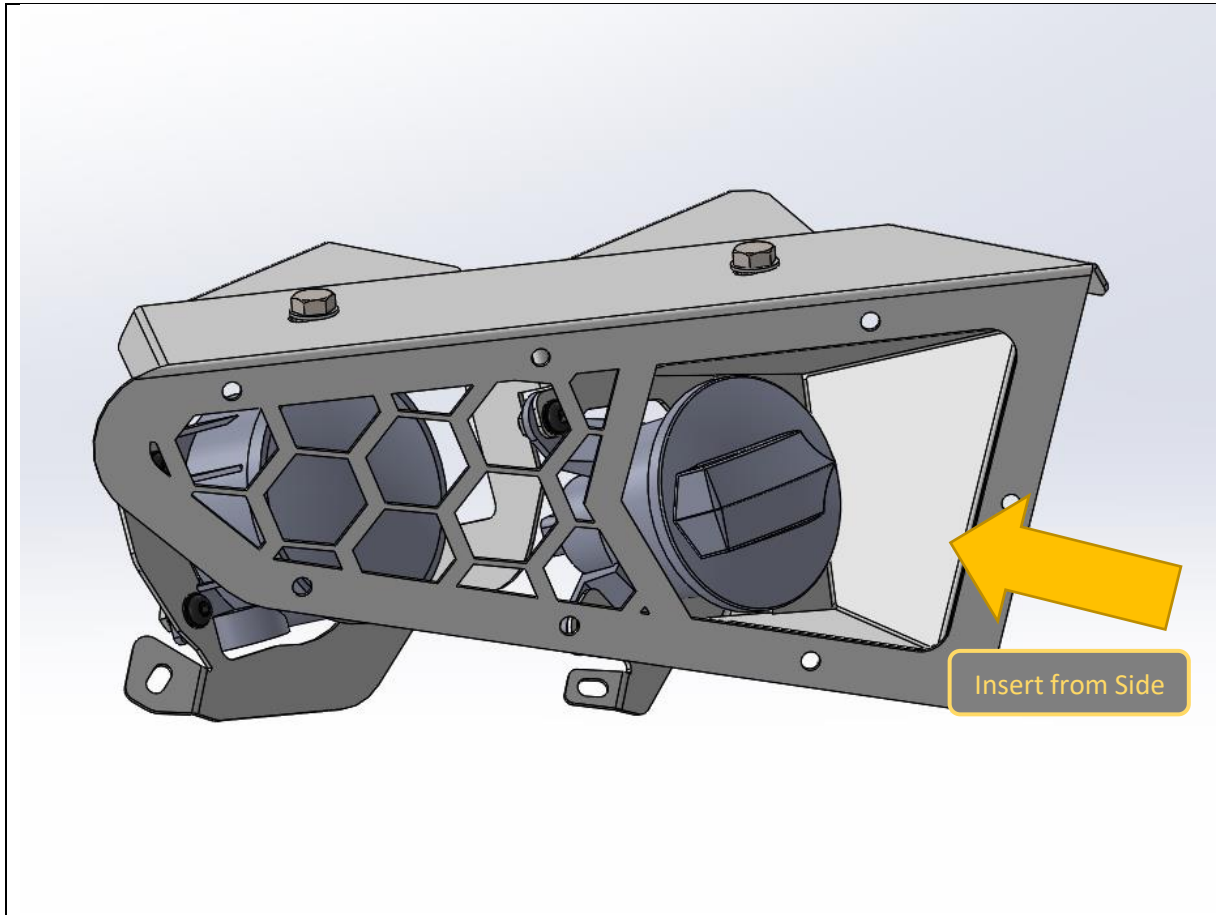

- 37. Fit the light bracket to the mesh cover panel using supplied M8x20 bolts, flat washers, and flange nuts.
- 38. As the light bracket is being positioned with the mesh panel, insert the indicator trim bracket in position between the indicator and the mesh panel, from the side.

TOOLS REQUIRED
13mm Spanner / Socket

FASTENERS
2x M8x20 Bolts,
2x M8 Flat washers
2x M8 Flange Nuts
Per Side

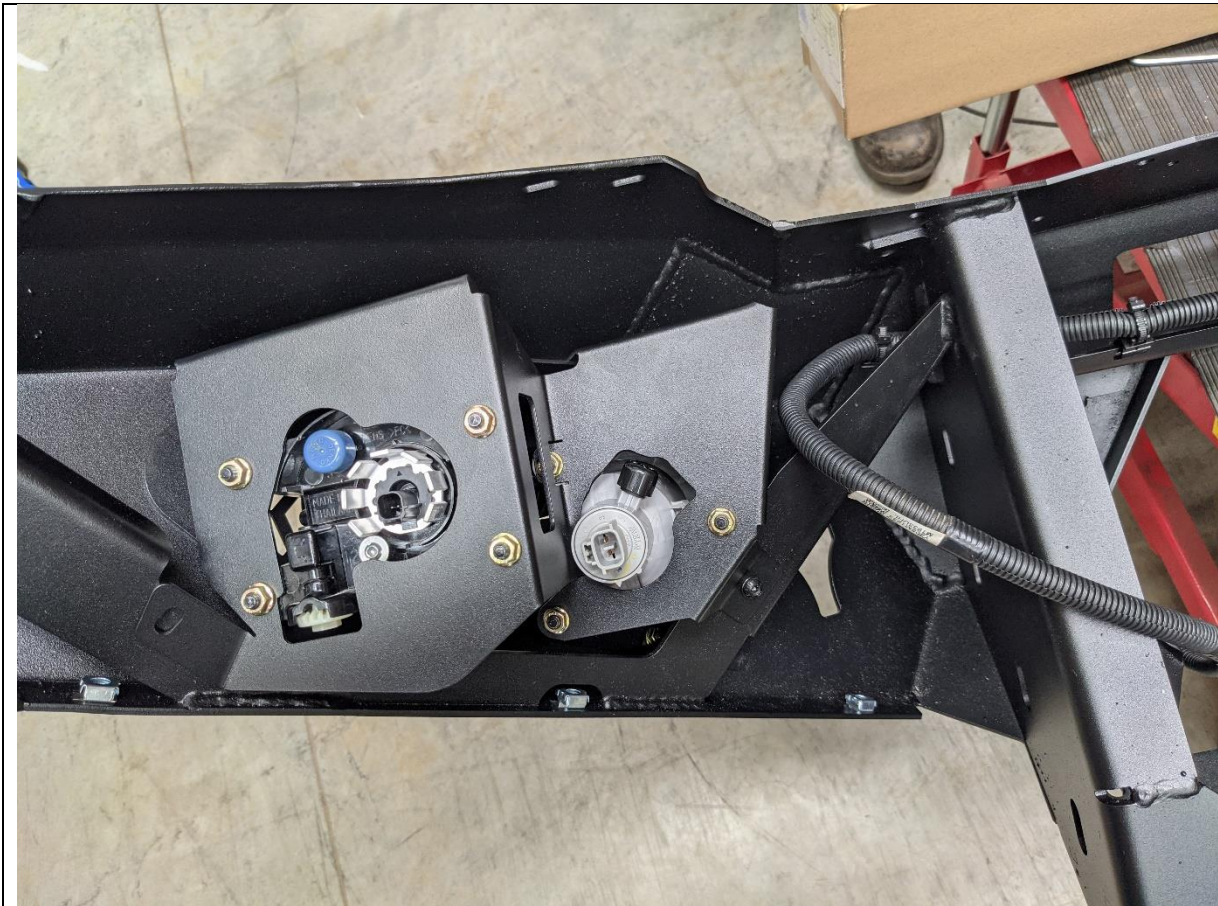

- 39. Insert the assembled light bracket / mesh panel into the wing of the bar.
- 40. Secure to wing brace with supplied M6x16 button head bolts, washers, and flange Nuts

TOOLS REQUIRED
4mm Hex Key

FASTENERS
2x M6x16 Button Head Screw
2x M6 Flat Washer
2x M6 Flange Nut

Per side




41. Secure to the wing of bar using with supplied M6x16 button head bolts, washers, and flange Nuts
42. Re install wiring harness to bar and plug in connectors for fog light and indicators
43. If equipped, re fit parking sensors to bar by relocating original housings to the holes on the bar.

TOOLS REQUIRED
4mm Hex Key

FASTENERS

7x M6x16 Button Head Screw
7x M6 Flat Washer
7x M6 Flange Nut

Per side

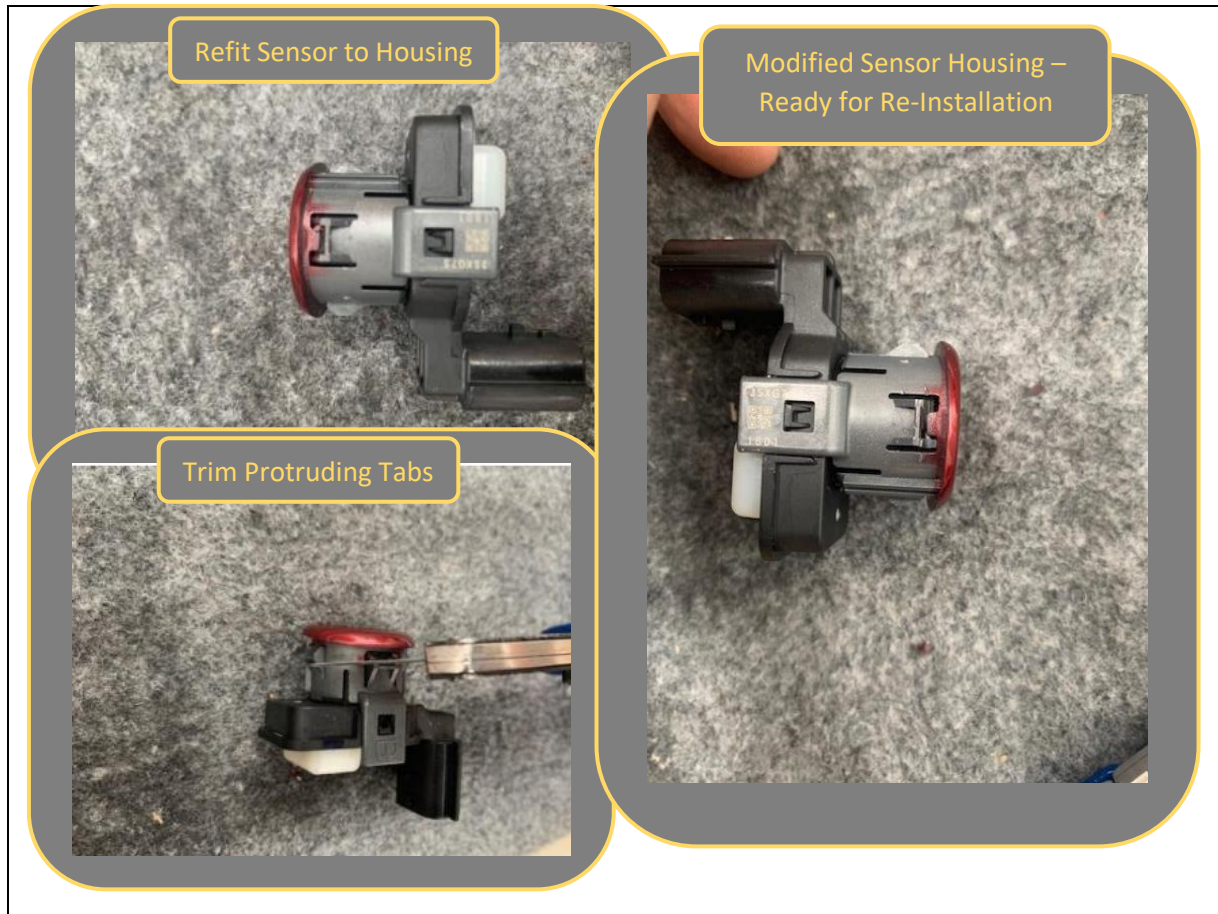


<p>44. Re install wiring harness to bar and plug in connectors for fog light and indicators</p>	<p>TOOLS REQUIRED Utility Knife</p>
<p>45. If equipped with parking sensors, you'll need to do a small mod to allow them to grip on the bull bar which is thicker than the factory bumper.</p> <p>46. Fit sensor back into housing (top left)</p> <p>47. Using a Utility knife trim 2mm off the front of the push in tabs (up to the join in the middle as shown in bottom left) Do for all 4 tabs around sensor.</p> <p>48. Photo to the right shown, is a completed sensor. Repeat for other sensors.</p> <p>49. Re-fit parking sensors to bar by relocating original housings to the holes on the bar.</p> <p>50. If parking sensors not equipped fit plastic blanking plugs to parking sensor holes on bar.</p>	<p>FASTENERS</p>



- 51. If fitting an integrated light bar, do so now. Leave bolts loose at this stage to allow fitment of mesh panels.
- 52. The bar is designed to fit a Offroad Animal 22 inch light bar. If fitting this light bar, assemble bar with legs out, and it will line up with the slots in the center gusset. Secure with fasteners supplied with the light bar. The bar can accommodate most other "20 inch" size light (20-22 inch long) bars
- 53. If fitting stealth top hoop or round lights do so at this stage.
- 54. Fit the Lower Grille mesh panel to the top pan of the bar.
- 55. Fit the Pan Brace between the center gusset and top of pan at the center using supplied fasteners. The top fastening uses the same bolt as the center of the lower grille mesh panel.

TOOLS REQUIRED
Refer to light bar instructions

FASTENERS
Supplied with Light bar
M6x16 Button
M6 Flat washer
M6 Flange Nut

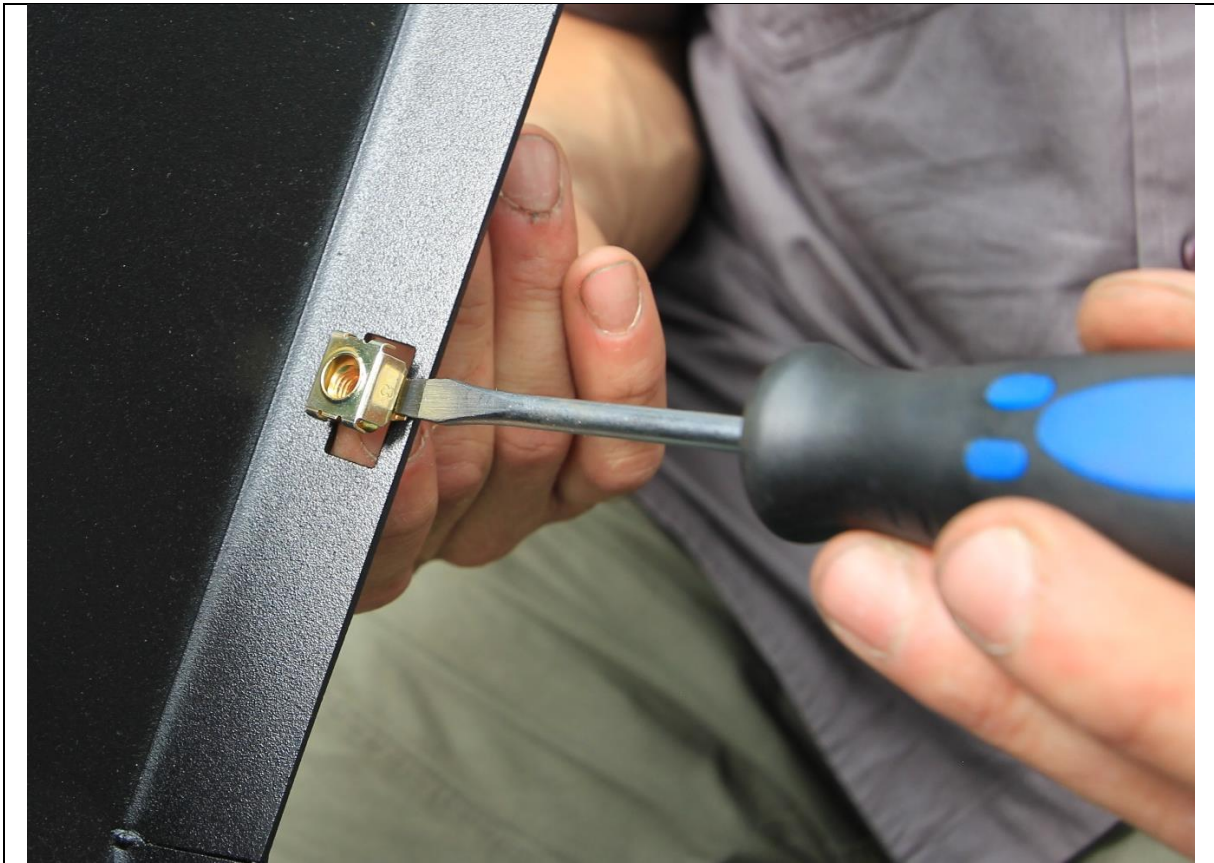

56. Fit 5x cage nuts from small parts kit to rectangular slots in bottom of wing.

Use a small flat bladed screwdriver to push the edge of the cage to engage with the slot to aid fitting.

TOOLS REQUIRED
Flat Blade Screwdriver

FASTENERS




57. Fit the supplied lengths of side bulb pinch weld rubber to the outermost edge of the wing on each side of the bullbar.

58. Trim to length if required.

TOOLS REQUIRED

FASTENERS

2x side bulb pinch weld rubber

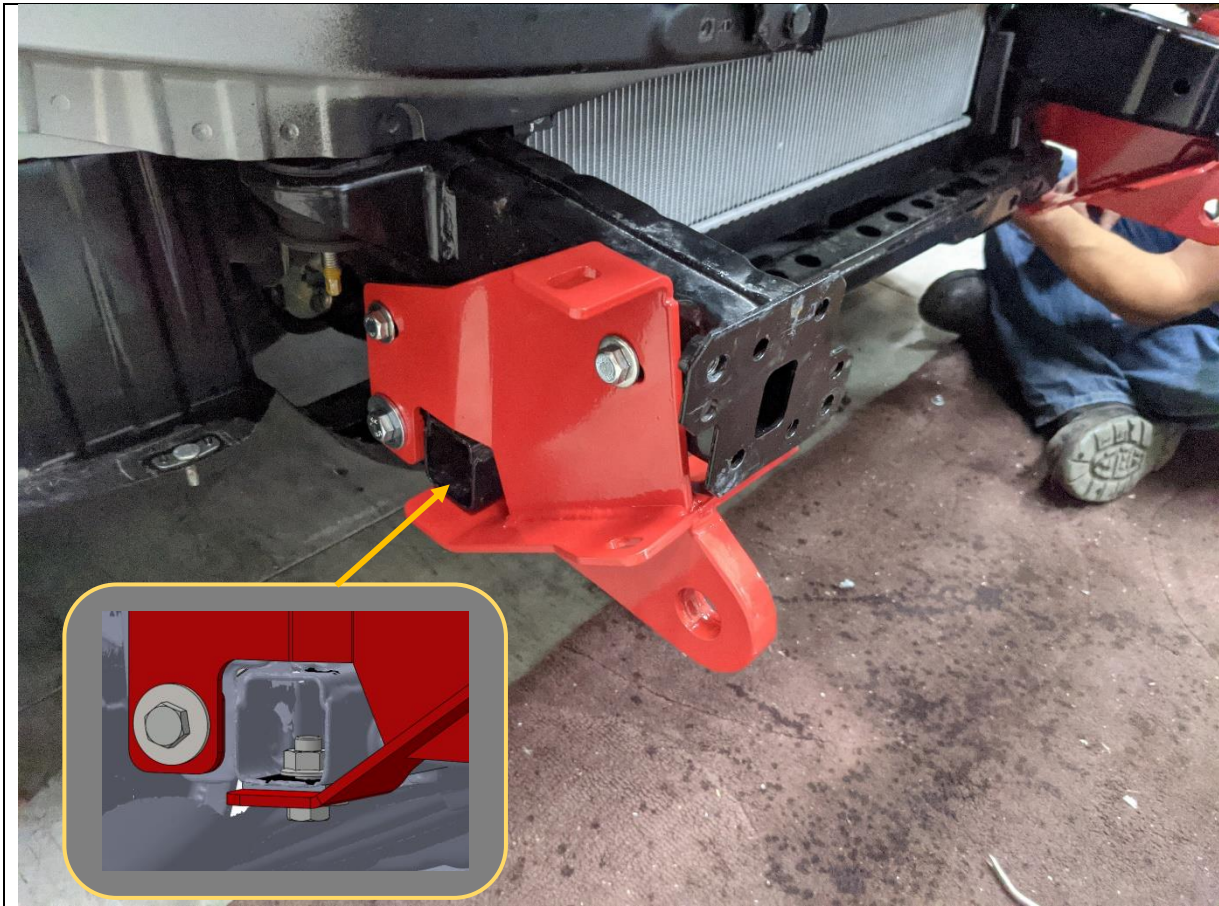


59. Fit the Tow Point to the chassis using the lollipop nut plate through the center of the chassis rail and the M10 / M12 nut plate behind the rear section of chassis. Use M12X30 bolt with flange nut inside chassis rail for bottom of mount.
60. Secure in place to threaded mounting points in chassis using original factory bolts. Leave bolts loose at this stage.

TOOLS REQUIRED

FASTENERS

- 2x M10x30
- 1x M10 Lollipop Nut Plate
- 2x M12x30 Bolt
- 1x M12 Flange Nut
- 2x M10 Flat Washer
- 2x M12 Flat Washer
- 1x M10 + M12 Nut Plate

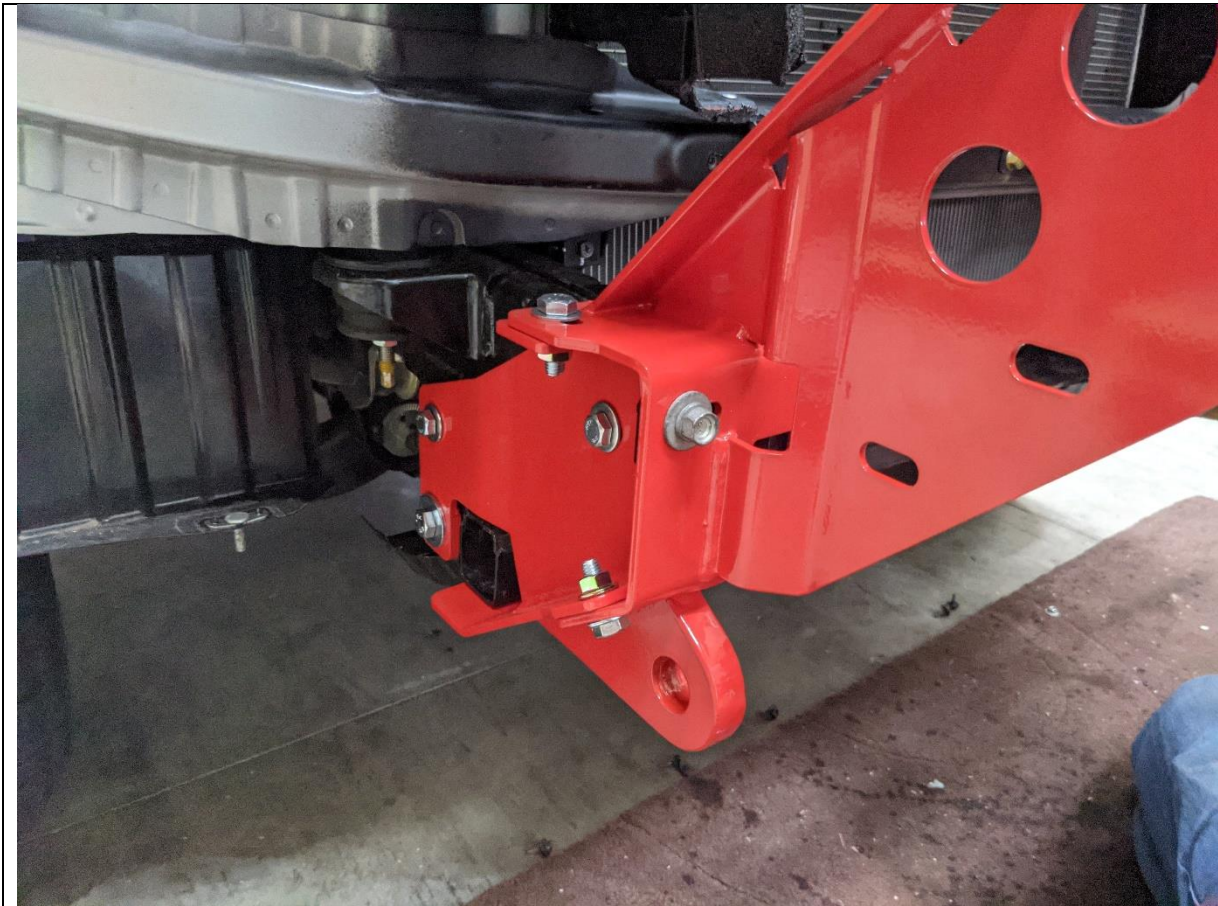


61. Fit the impact assembly to the chassis using the 14mm head factory bolts retained from the crash beam.
62. Secure to the tow point using 3x M10x30 bolts, flat washers and flange nuts as shown.
63. Repeat for both sides of vehicle. Leave finger tight at this stage

TOOLS REQUIRED

FASTENERS

- 2x Factory M10x1.25P Bolts
- 3x M10x30 Hex Bolt
- 3x M10 Flat washer
- 3x M10 Flange Nut

Per Side

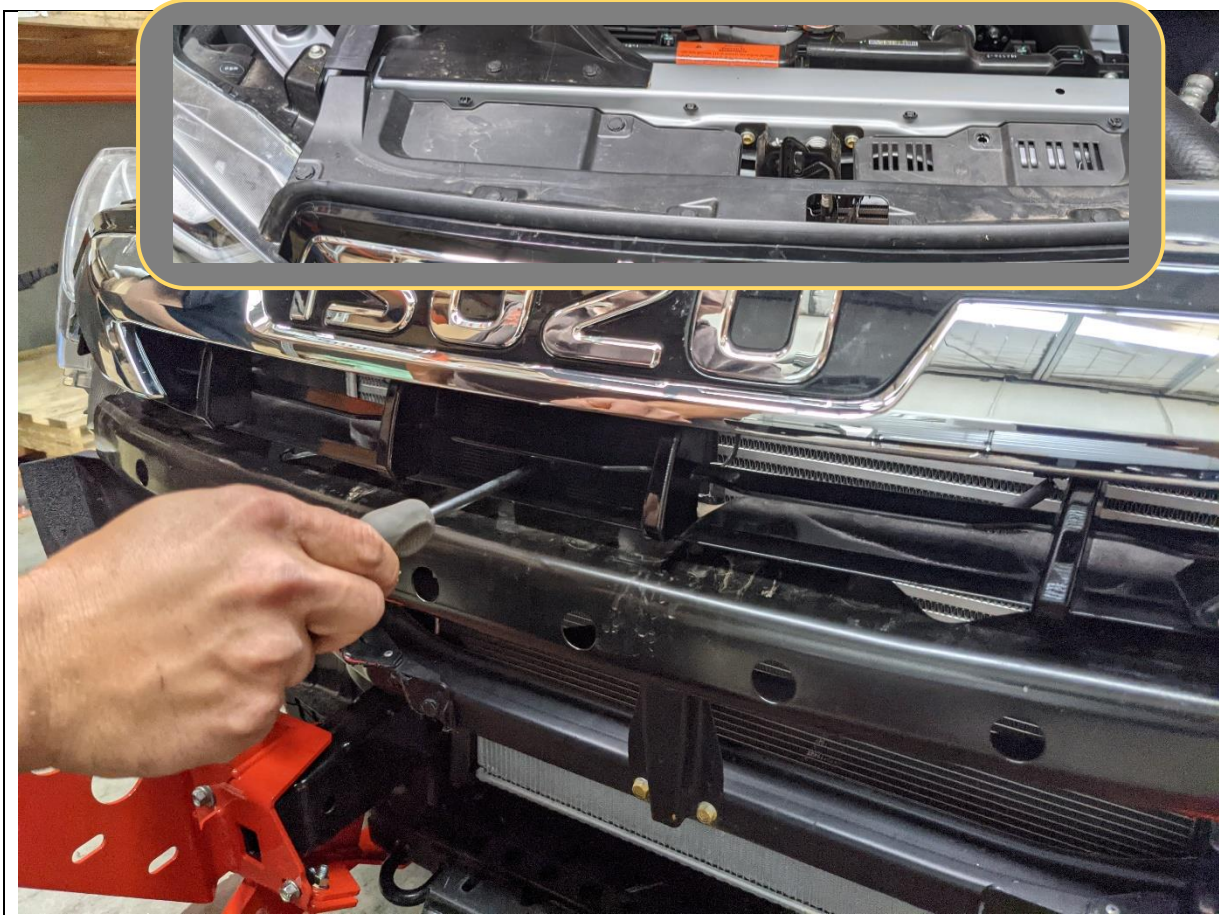

64. Re fit the upper grille section to the vehicle, re using the factory clips and screw.

TOOLS REQUIRED
Phillips Screwdriver

FASTENERS
Re Use Factory

<div data-bbox="660 237 951 331" data-label="Section-Header"> <p>MEASURE</p> </div> <div data-bbox="204 353 1358 667" data-label="Image"> </div>	
<div data-bbox="647 696 938 790" data-label="Section-Header"> <p>Adjust</p> </div> <div data-bbox="437 712 1126 1066" data-label="Image"> </div>	
<p>65. Measure distance between bullbar uprights with tape measure. Note down this distance</p> <p>Distance = _____</p> <p>66. Measure and adjust the distance between the mounts on the vehicle to be 2-5mm greater than the distance measured.</p> <p>67. Tighten all bolts securing impact assembly and tow point, and re check distance. Re adjust as required to achieve correct distance.</p>	<p>TOOLS REQUIRED</p> <p>13mm Socket 14mm Socket 16mm Socket</p> <hr/> <p>FASTENERS</p>



68. With assistance, either from another person or a lifting trolley, lift the bar onto the mounts on the vehicle.

TOOLS REQUIRED

Lift Trolley

FASTENERS



69. Secure bar to mount with 4x M12x30 Bolts, heavy duty washers and 3x M12 Nyloc and 1x M12 flange nut per side. Finger tight at this stage.

70. With assistance, from another person, align the bar with the edges of the vehicle. Adjust such that the clearances are neat and even side to side. When happy, tighten the bolts with the flange nut to lock the bar in position.

Acceptable range of clearances shown in image above.
Ensure clearances are maintained all the way through below the headlight.

71. Once in position, tighten the M12 bolts using socket and spanner. An impact driver may be used to speed up this process.

TOOLS REQUIRED

Lifting Trolley
19&18mm Socket and Spanner

FASTENERS

8x M12x40 Bolt
16x M12 Heavy Duty Large Washer
8x M12 Nyloc Nut



72. If fitting a winch, do so now.

73. The bar is designed to fit most low mount winches, in foot down configuration. WARN ZEON 10 is largest winch confirmed to fit.


74. The control box can to be mounted on top of the winch. Winches usually come with a bracket to allow this. Refer to winch manufacturer.

TOOLS REQUIRED

Refer to winch Instructions

FASTENERS

Refer to Winch instruction.

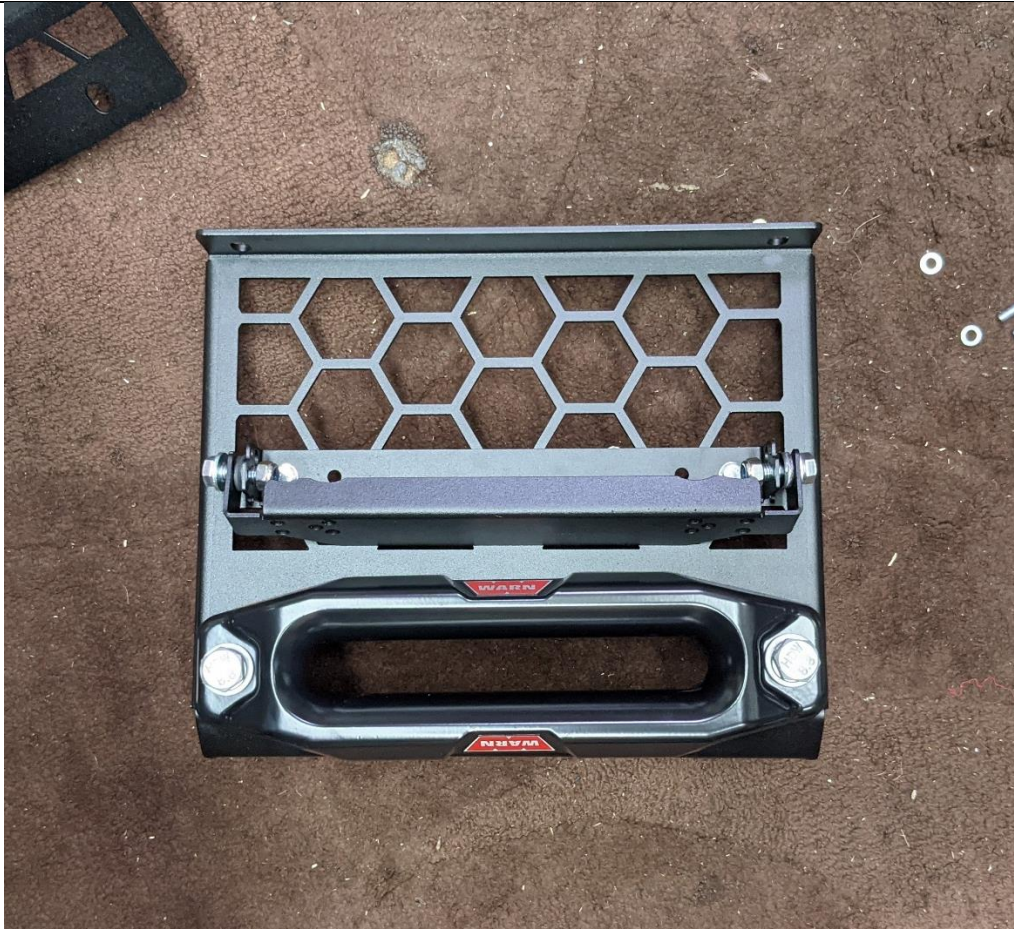

- 75. Prepare the center mesh panel for fitment.
- 76. If required, fit winch fairlead to Mesh Fairlead Mount (M-0014). Use M10 or 3/8" fasteners supplied with winch. The bar is only compatible with Hawse type fairleads.
- 77. Fit number plate flip kit to fairlead mount, using fasteners supplied in kit.

TOOLS REQUIRED

Depends on winch supplied fasteners

FASTENERS



- 78. Fit the Mesh Fairlead Mount (M-0014) to the center of the bar, using M8x16 Button head (Top), M8x20 Button Head (Bottom) M8 Flat Washers and M8 Flange Nuts.
- 79. Tighten fasteners using 13mm socket / spanner and 5mm Allen Wrench.

TOOLS REQUIRED

- 13mm Spanner
- 5mm Allen Wrench

FASTENERS

- 2x M8x16 Button Head
- 2x M8x20 Button Head
- 4x M8 Flange Nut
- 4x M8 Flat Washer



80. Fit Mesh Infill Panels (M-0008L/R). Secure with M8x16 button head bolt and M8 flat washer into the threaded insert in bar for top mount. The flange of the infill panel should sit on the inside of the bar.

81. Don't fit any bolts to bottom holes at this stage.

82. Tighten top fasteners using 5mm Allen Wrench.

TOOLS REQUIRED
5mm Allen Wrench

FASTENERS


2x M8x16 Button Head
2x M8 Flange Nut



83. Re-connect fog light and parking sensor (if equipped) wiring connectors.

TOOLS REQUIRED

FASTENERS

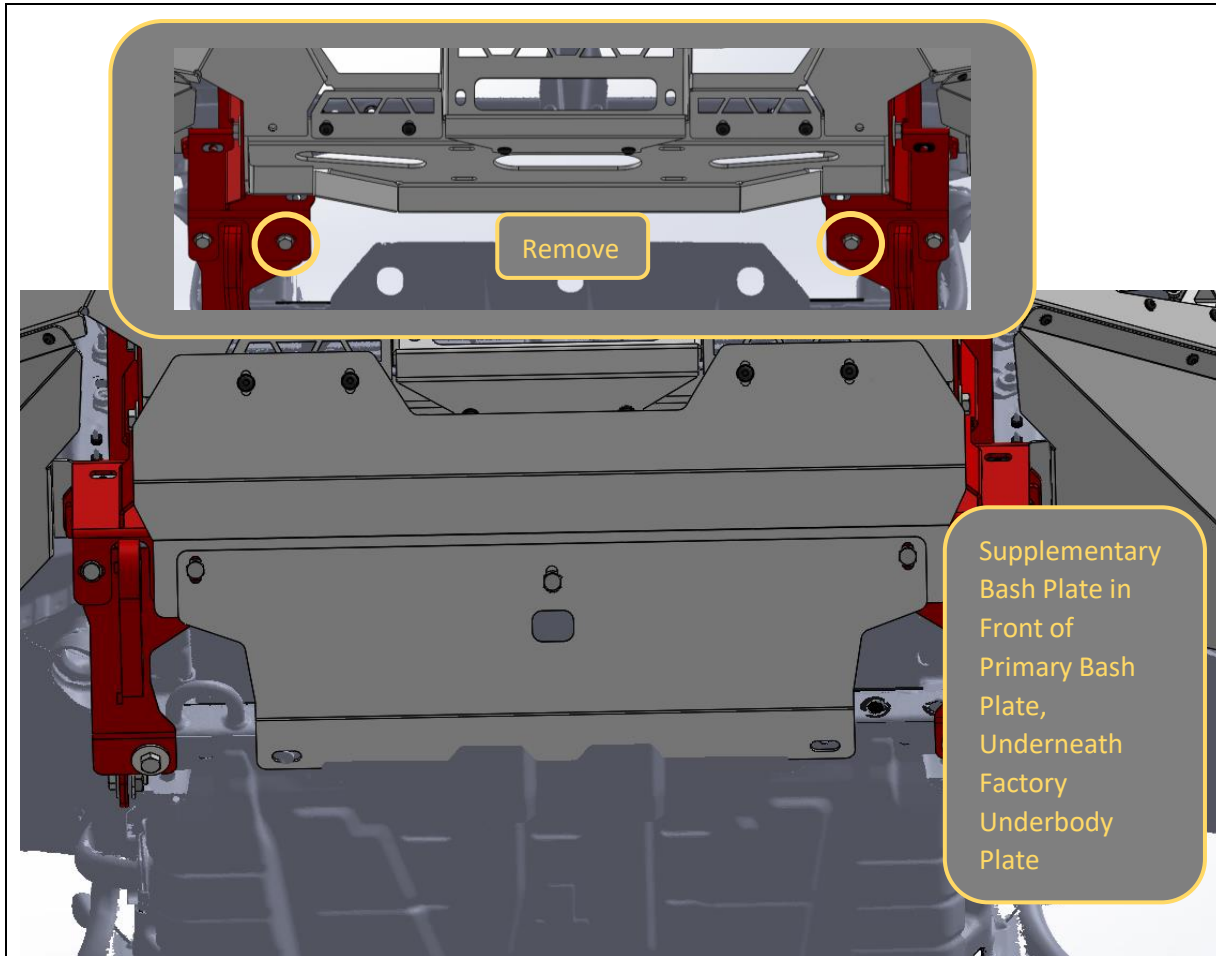


- 84. Before fitting bash plates, remove the M10x30 Bolts on the inside of the tow point / impact assembly joint.
- 85. Fit Center Bash Plate using M8x20 button head, flat washer and flange nut to front face. Ensure these fasteners pass through the side mesh panels.
- 86. Secure the Supplementary and back of Center Bash Plate using M10x30 hex head, flat washers and M10 flange nut removed in previous step, through the tow point / impact assembly parts.
- 87. Secure bottom of Supplementary bash plate to the factory bolt points, using factory fasteners. Refit the factory underbody on top of the supplementary bash plate.
- 88. Tighten All Bottom fasteners using 16/17mm spanner & socket
- 89. Tighten front fasteners using 13mm socket / spanner and 5mm Allen Wrench. Reach through access hole in mesh panel to reach nut.

TOOLS REQUIRED

- 16/17mm Spanner
- 16/17mm Socket
- 5mm Allen Key
- 13mm spanner

FASTENERS


- 4x M8x20 Button Head
- 4x M8 Flange Nut
- 4x M8 Flat Washer

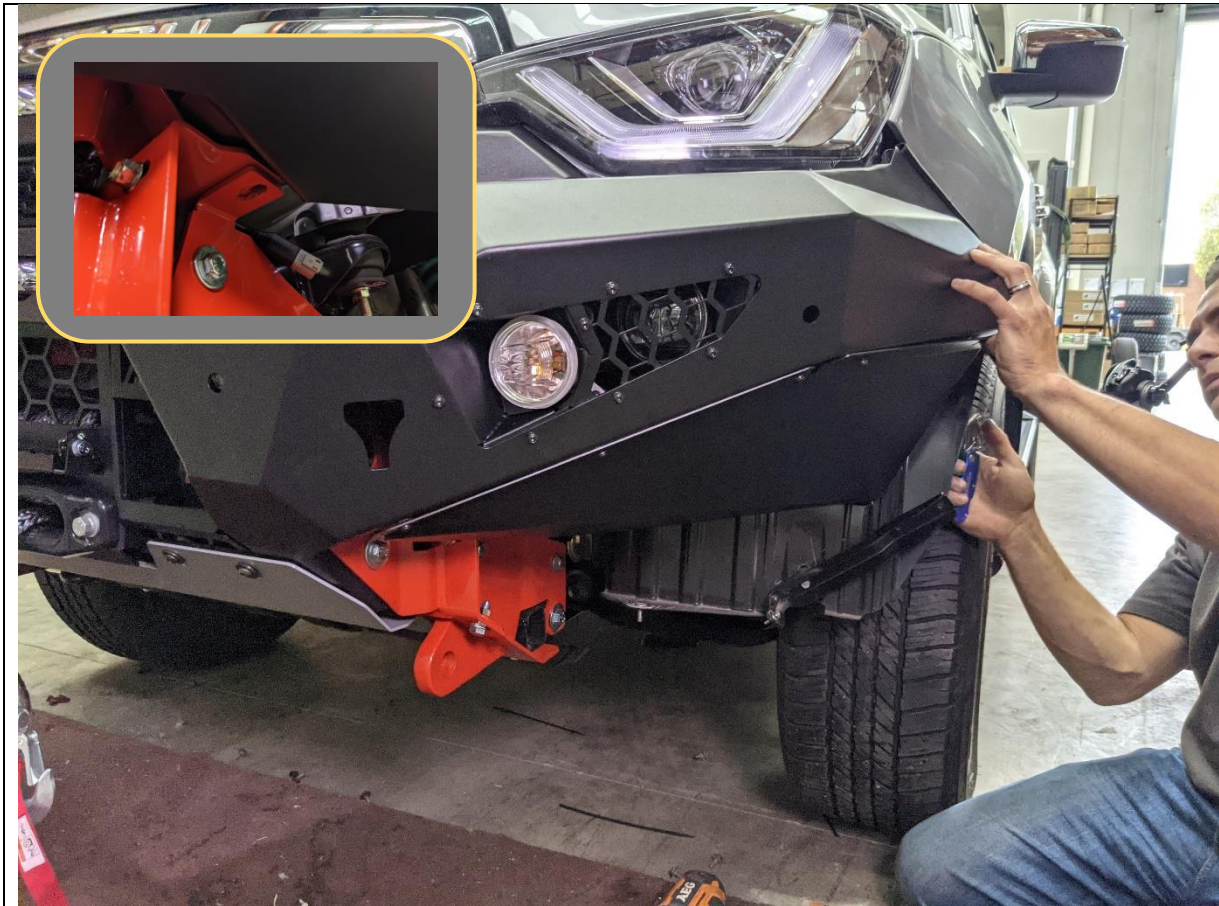

- 90. Remove the outside top bolts from impact assembly/tow point.
- 91. Fit the side under panels by first sitting the bottom mount on top of the impact assembly, then inserting the 5x M6x16 bolts into the cage nuts fitted earlier
- 92. Tighten with 4mm Allen wrench
- 93. Secure bottom of side under panel to mount using bolt removed from joint earlier.
- 94. Tighten with 16/17mm spanner / socket

TOOLS REQUIRED
16/17mm Spanner
5mm Allen Wrench
4mm Allen Wrench

FASTENERS
10x M6x16 Button Head
10x M6 Flat Washer

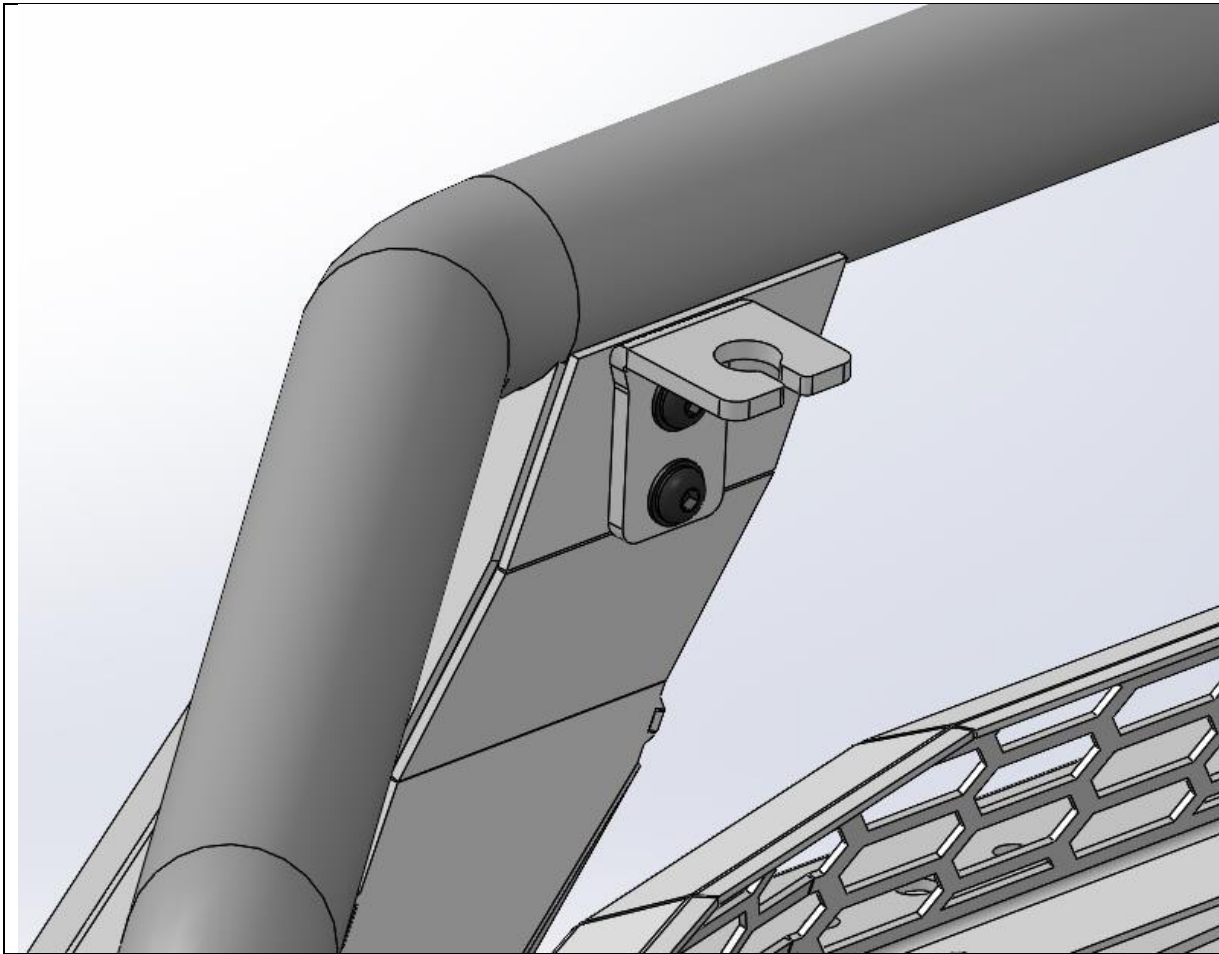

- 95. If fitting antennas to a Toro bar, Fit the antenna brackets to the back side of the uprights using supplied M8x20 Button head bolts, Washers into the weld nuts in the bar uprights
- 96. Else fit the 2x M8x20 black button head bolts and black washers to the back of each bullbar upright, to protect nut threads in bar for future use.

TOOLS REQUIRED
5mm Hex Key

FASTENERS

2x M8x20 Black Button Head
2xM8 Flat Washer

Per Side



- 97. Using a sharp utility knife, cut back the plastic inner wheel arch liner to match the profile of the under panel.
- 98. Tuck the wheel arch liner behind the flanges on the under panel.
- 99. Repeat for both sides of vehicle.

TOOLS REQUIRED
Utility Knife

FASTENERS



<p>100. Re-check that all fasteners are tight.</p> <p>101. Re-tit number plate to number plate flip.</p> <p>102. You're done. Hit the tracks and enjoy your newly protected D-MAX!</p>	<p>TOOLS REQUIRED</p>
	<p>FASTENERS</p>